

Automatic Transfer Switch Equipment

M2Rxxx-110/2



- PC-Class change-over switch
- Dual power supply design: power supply A (main) and power supply B (standby)
- Supports AC systems with a rated current of 6 A to 100 A
- Automatic switching within 100 milliseconds
- Compliance: IEC 60947-6-1


The M2R Automatic Transfer Switching Equipment (ATSE) is a PC-class miniature power transfer device designed for residential applications. It supports dual power inputs from a main and a backup source. In the event of a main power failure or abnormality, the device automatically transfers to the backup power within 100 milliseconds, ensuring continuous and reliable power supply. It is suitable for low-voltage AC systems rated from 6 A to 100 A at 50/60 Hz, features DIN rail mounting, and complies with IEC 60947-6-1:2021 standards.

Technical Data

M2Rxxx-110/2	M2R40-110/2	M2R63-110/2	M2R100-110/2
IEC Electrical			
Rated Operational Voltage (AC)	U_e	110 V	
Case Grade		100 A	
Rated Operational Current	I_e	40 A	100 A
Rated Insulation Voltage	U_i	690 V	
Rated Impulse Withstand Voltage	U_{imp}	8 kV	
Rated Frequency		50/60 Hz	
Automatic Switching Time		≤ 100 ms	
Pole Number		2P	
Usage Category		40 A / 63 A: AC-33iB 100A: AC-31B	
Rated Conditional Short-Circuit Current	I_q	50 kA	
Short-Circuit Protection Device (Fuse)		RT16-00-63A	
Rated Impulse Withstand Voltage		8 kV	
TSE Class		PC-Class: Can Be Switched On and Loaded Without Generating Short-Circuit Current	
Control Circuit		Rated Control Voltage Us: AC 110 V, 50/60 Hz Normal Working Conditions: 85% - 110% Us	
Auxiliary Circuit		110 V, 50/60 Hz, $I_e = 5$ A	
Overvoltage / Undervoltage Protection Range		Undervoltage Value: 85 V Recovery Value: 95 V Overvoltage Value: 145 V Recovery Value: 130 V (± 5 V)	
Mechanical Life		≥ 5000 Times	
Electrical Life		≥ 2000 Times	
Enclosure Material		PA66 FR	
Order Information			
Ordering Code			
M2Rxxx-110/2	4001220	6301220	1011220




Product Overview

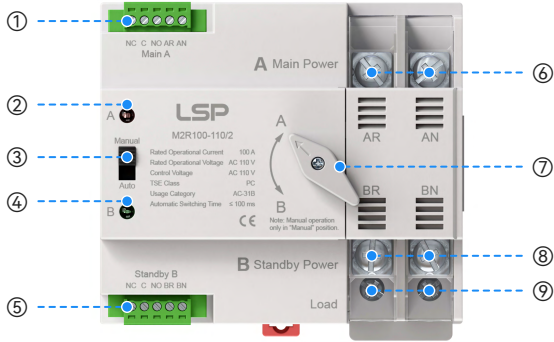

- ① Composite Terminal Block for Main Power A (Signalling & Motor Supply)
- ② Main Power Indicator
- ③ Manual / Automatic Selector Switch
- ④ Standby Power Indicator
- ⑤ Composite Terminal Block for Standby Power B (Signalling & Motor Supply)
- ⑥ Main Power Terminals (Main Power Input)
- ⑦ Manual Rotary Switch
- ⑧ Standby Power Terminals (Standby Power Input)
- ⑨ Load Terminals (Power Output to Load)


Dimensions & Packaging

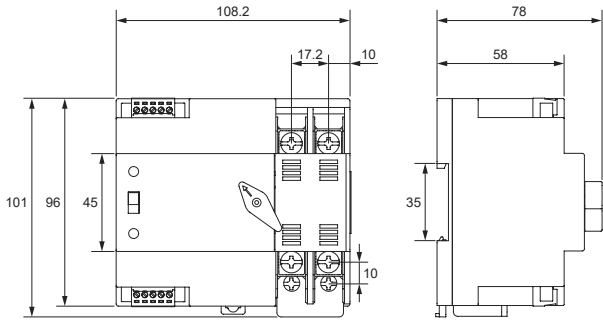

[mm]

Packing Information	
Units per Carton	20 pcs
Product / Inner box / Carton Weight	0.51 kg / 0.1 kg / 0.5 kg
Net / Gross Weight per Carton	10.2 kg / 12.7 kg
Dimensions (H × W × L)	[300 × 290 × 555 mm]

Easy Installation Instructions

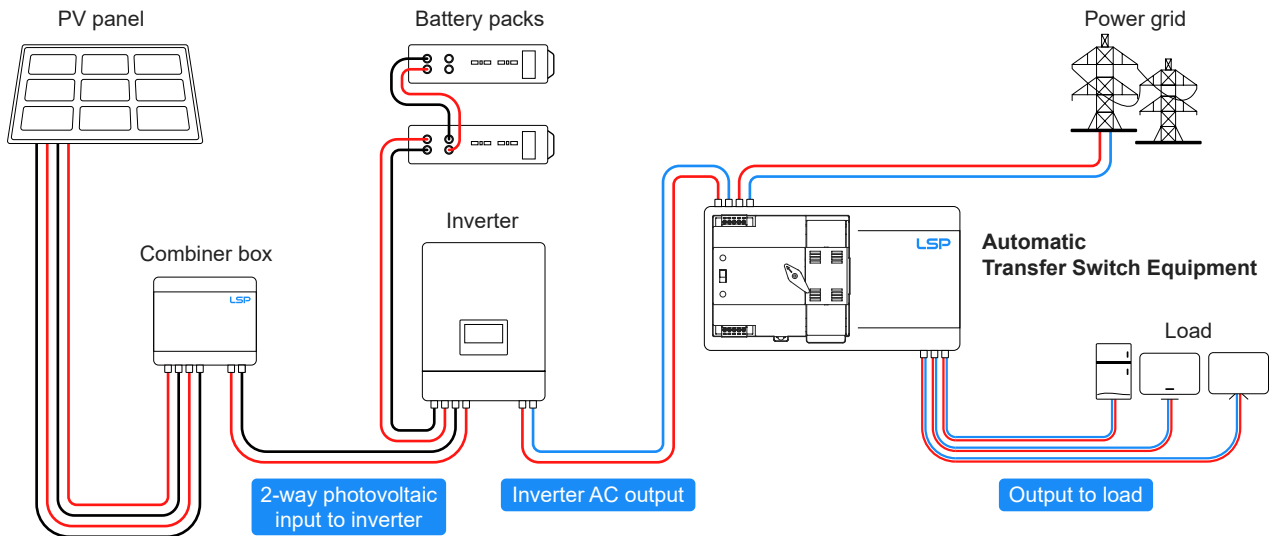

Automatic Transfer Switch Equipment

M2Rxxx-110/3



- PC-Class change-over switch
- Dual power supply design: power supply A (main) and power supply B (standby)
- Supports AC systems with a rated current of 6 A to 100 A
- Automatic switching within 100 milliseconds
- Compliance: IEC 60947-6-1


The M2R Automatic Transfer Switching Equipment (ATSE) is a PC-class miniature power transfer device designed for residential applications. It supports dual power inputs from a main and a backup source. In the event of a main power failure or abnormality, the device automatically transfers to the backup power within 100 milliseconds, ensuring continuous and reliable power supply. It is suitable for low-voltage AC systems rated from 6 A to 100 A at 50/60 Hz, features DIN rail mounting, and complies with IEC 60947-6-1:2021 standards.

Technical Data

M2Rxxx-110/3	M2R40-110/3	M2R63-110/3	M2R100-110/3
IEC Electrical			
Single-Phase Rated Voltage (phase-to-neutral) (AC)		110 V	
Rated Operational Voltage (phase-to-phase) (AC)	U_e	200 V	
Case Grade		100 A	
Rated Operational Current	I_e	40 A	100 A
Rated Insulation Voltage	U_i	690 V	
Rated Impulse Withstand Voltage	U_{imp}	8 kV	
Rated Frequency		50/60 Hz	
Automatic Switching Time		≤ 100 ms	
Pole Number		3P	
Usage Category		40 A / 63 A: AC-33iB 100A: AC-31B	
Rated Conditional Short-Circuit Current	I_q	50 kA	
Short-Circuit Protection Device (Fuse)		RT16-00-63A	
Rated Impulse Withstand Voltage		8 kV	
TSE Class		PC-Class: Can Be Switched On and Loaded Without Generating Short-Circuit Current	
Control Circuit		Rated Control Voltage U_s : AC 110 V, 50/60 Hz Normal Working Conditions: 85% - 110% U_s	
Auxiliary Circuit		110 V, 50/60 Hz, $I_e = 5$ A	
Overvoltage / Undervoltage Protection Range		Undervoltage Value: 85 V Recovery Value: 95 V Overvoltage Value: 145 V Recovery Value: 130 V (±5 V)	
Mechanical Life		≥ 5000 Times	
Electrical Life		≥ 2000 Times	
Enclosure Material		PA66 FR	
Order Information			
Ordering Code			
M2Rxxx-110/3	4001320	6301320	1011320




Product Overview

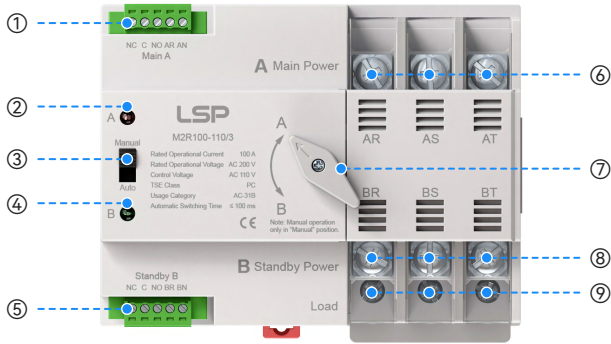

- ① Composite Terminal Block for Main Power A (Signalling & Motor Supply)
- ② Main Power Indicator
- ③ Manual / Automatic Selector Switch
- ④ Standby Power Indicator
- ⑤ Composite Terminal Block for Standby Power B (Signalling & Motor Supply)
- ⑥ Main Power Terminals (Main Power Input)
- ⑦ Manual Rotary Switch
- ⑧ Standby Power Terminals (Standby Power Input)
- ⑨ Load Terminals (Power Output to Load)


Dimensions & Packaging

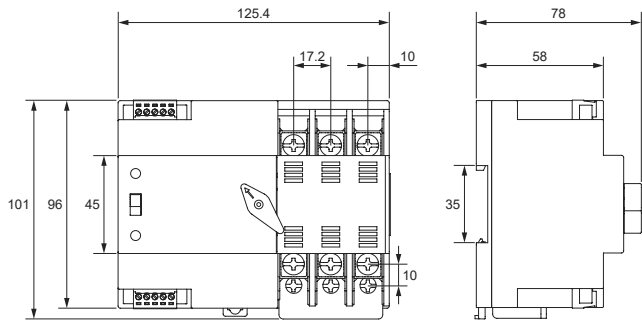

[mm]

Packing Information	
Units per Carton	20 pcs
Product / Inner box / Carton Weight	0.64 kg / 0.1 kg / 0.5 kg
Net / Gross Weight per Carton	12.8 kg / 15.3 kg
Dimensions (H × W × L)	[300 × 330 × 555 mm]

Easy Installation Instructions

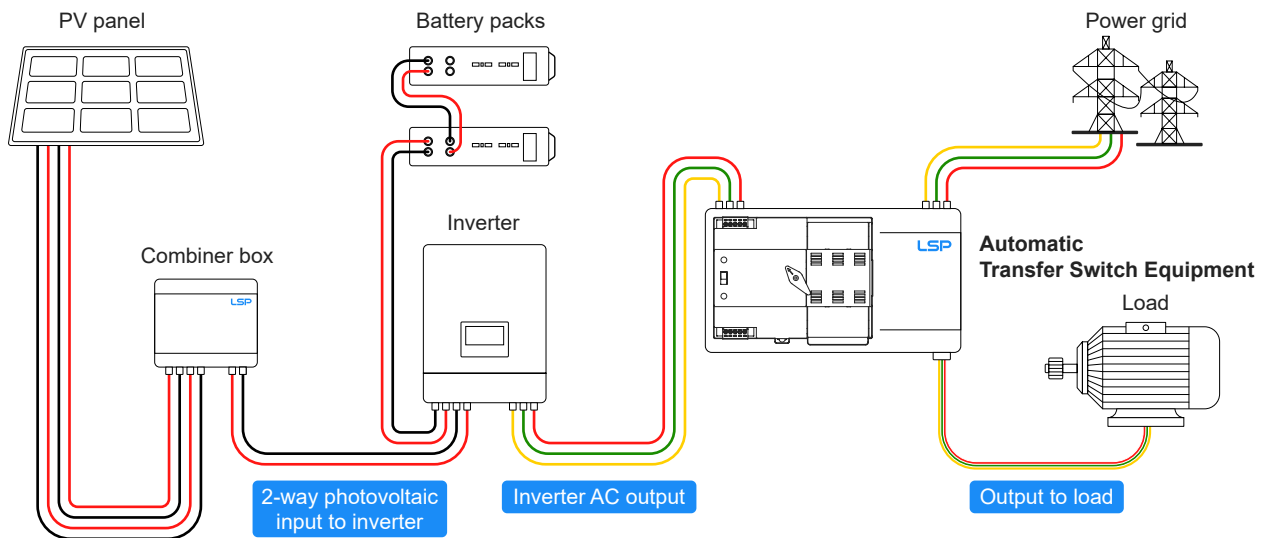

Automatic Transfer Switch Equipment

M2Rxxx-110/4



- PC-Class change-over switch
- Dual power supply design: power supply A (main) and power supply B (standby)
- Supports AC systems with a rated current of 6 A to 100 A
- Automatic switching within 100 milliseconds
- Compliance: IEC 60947-6-1

The M2R Automatic Transfer Switching Equipment (ATSE) is a PC-class miniature power transfer device designed for residential applications. It supports dual power inputs from a main and a backup source. In the event of a main power failure or abnormality, the device automatically transfers to the backup power within 100 milliseconds, ensuring continuous and reliable power supply. It is suitable for low-voltage AC systems rated from 6 A to 100 A at 50/60 Hz, features DIN rail mounting, and complies with IEC 60947-6-1:2021 standards.


Technical Data

M2Rxxx-110/4	M2R40-110/4	M2R63-110/4	M2R100-110/4
IEC Electrical			
Single-Phase Rated Voltage (phase-to-neutral) (AC)		110 V	
Rated Operational Voltage (phase-to-phase) (AC)	U_e	200 V	
Case Grade		100 A	
Rated Operational Current	I_e	40 A	100 A
Rated Insulation Voltage	U_i	690 V	
Rated Impulse Withstand Voltage	U_{imp}	8 kV	
Rated Frequency		50/60 Hz	
Automatic Switching Time		≤ 100 ms	
Pole Number		4P	
Usage Category		40 A / 63 A: AC-33iB 100A: AC-31B	
Rated Conditional Short-Circuit Current	I_q	50 kA	
Short-Circuit Protection Device (Fuse)		RT16-00-63A	
Rated Impulse Withstand Voltage		8 kV	
TSE Class		PC-Class: Can Be Switched On and Loaded Without Generating Short-Circuit Current	
Control Circuit		Rated Control Voltage Us: AC 110 V, 50/60 Hz Normal Working Conditions: 85% - 110% Us	
Auxiliary Circuit		110 V, 50/60 Hz, $I_e = 5 A$	
Overvoltage / Undervoltage Protection Range		Undervoltage Value: 85 V Recovery Value: 95 V Overvoltage Value: 145 V Recovery Value: 130 V (±5 V)	
Mechanical Life		≥ 5000 Times	
Electrical Life		≥ 2000 Times	
Enclosure Material		PA66 FR	
Order Information			
Ordering Code			
M2Rxxx-110/4	4001420	6301420	1011420




M2Rxxx-110/4

Product Overview

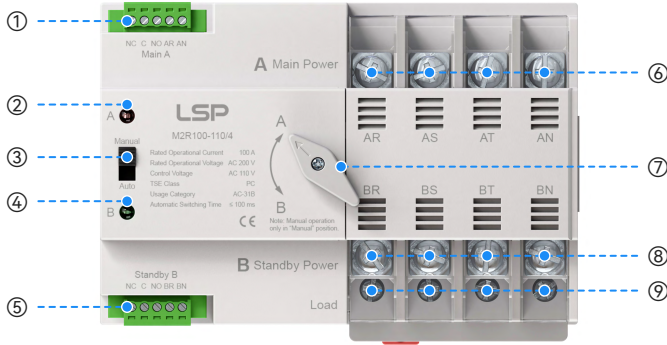

- ① Composite Terminal Block for Main Power A (Signalling & Motor Supply)
- ② Main Power Indicator
- ③ Manual / Automatic Selector Switch
- ④ Standby Power Indicator
- ⑤ Composite Terminal Block for Standby Power B (Signalling & Motor Supply)
- ⑥ Main Power Terminals (Main Power Input)
- ⑦ Manual Rotary Switch
- ⑧ Standby Power Terminals (Standby Power Input)
- ⑨ Load Terminals (Power Output to Load)

Dimensions & Packaging

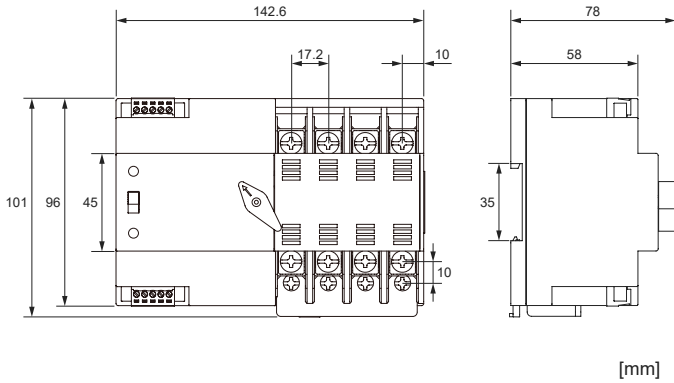

Packing Information	
Units per Carton	20 pcs
Product / Inner box / Carton Weight	0.7 kg / 0.1 kg / 0.5 kg
Net / Gross Weight per Carton	14.0 kg / 16.5 kg
Dimensions (H × W × L)	[300 × 360 × 555 mm]

Easy Installation Instructions

