


Data Surge Protector

Wiring Diagram & Installation

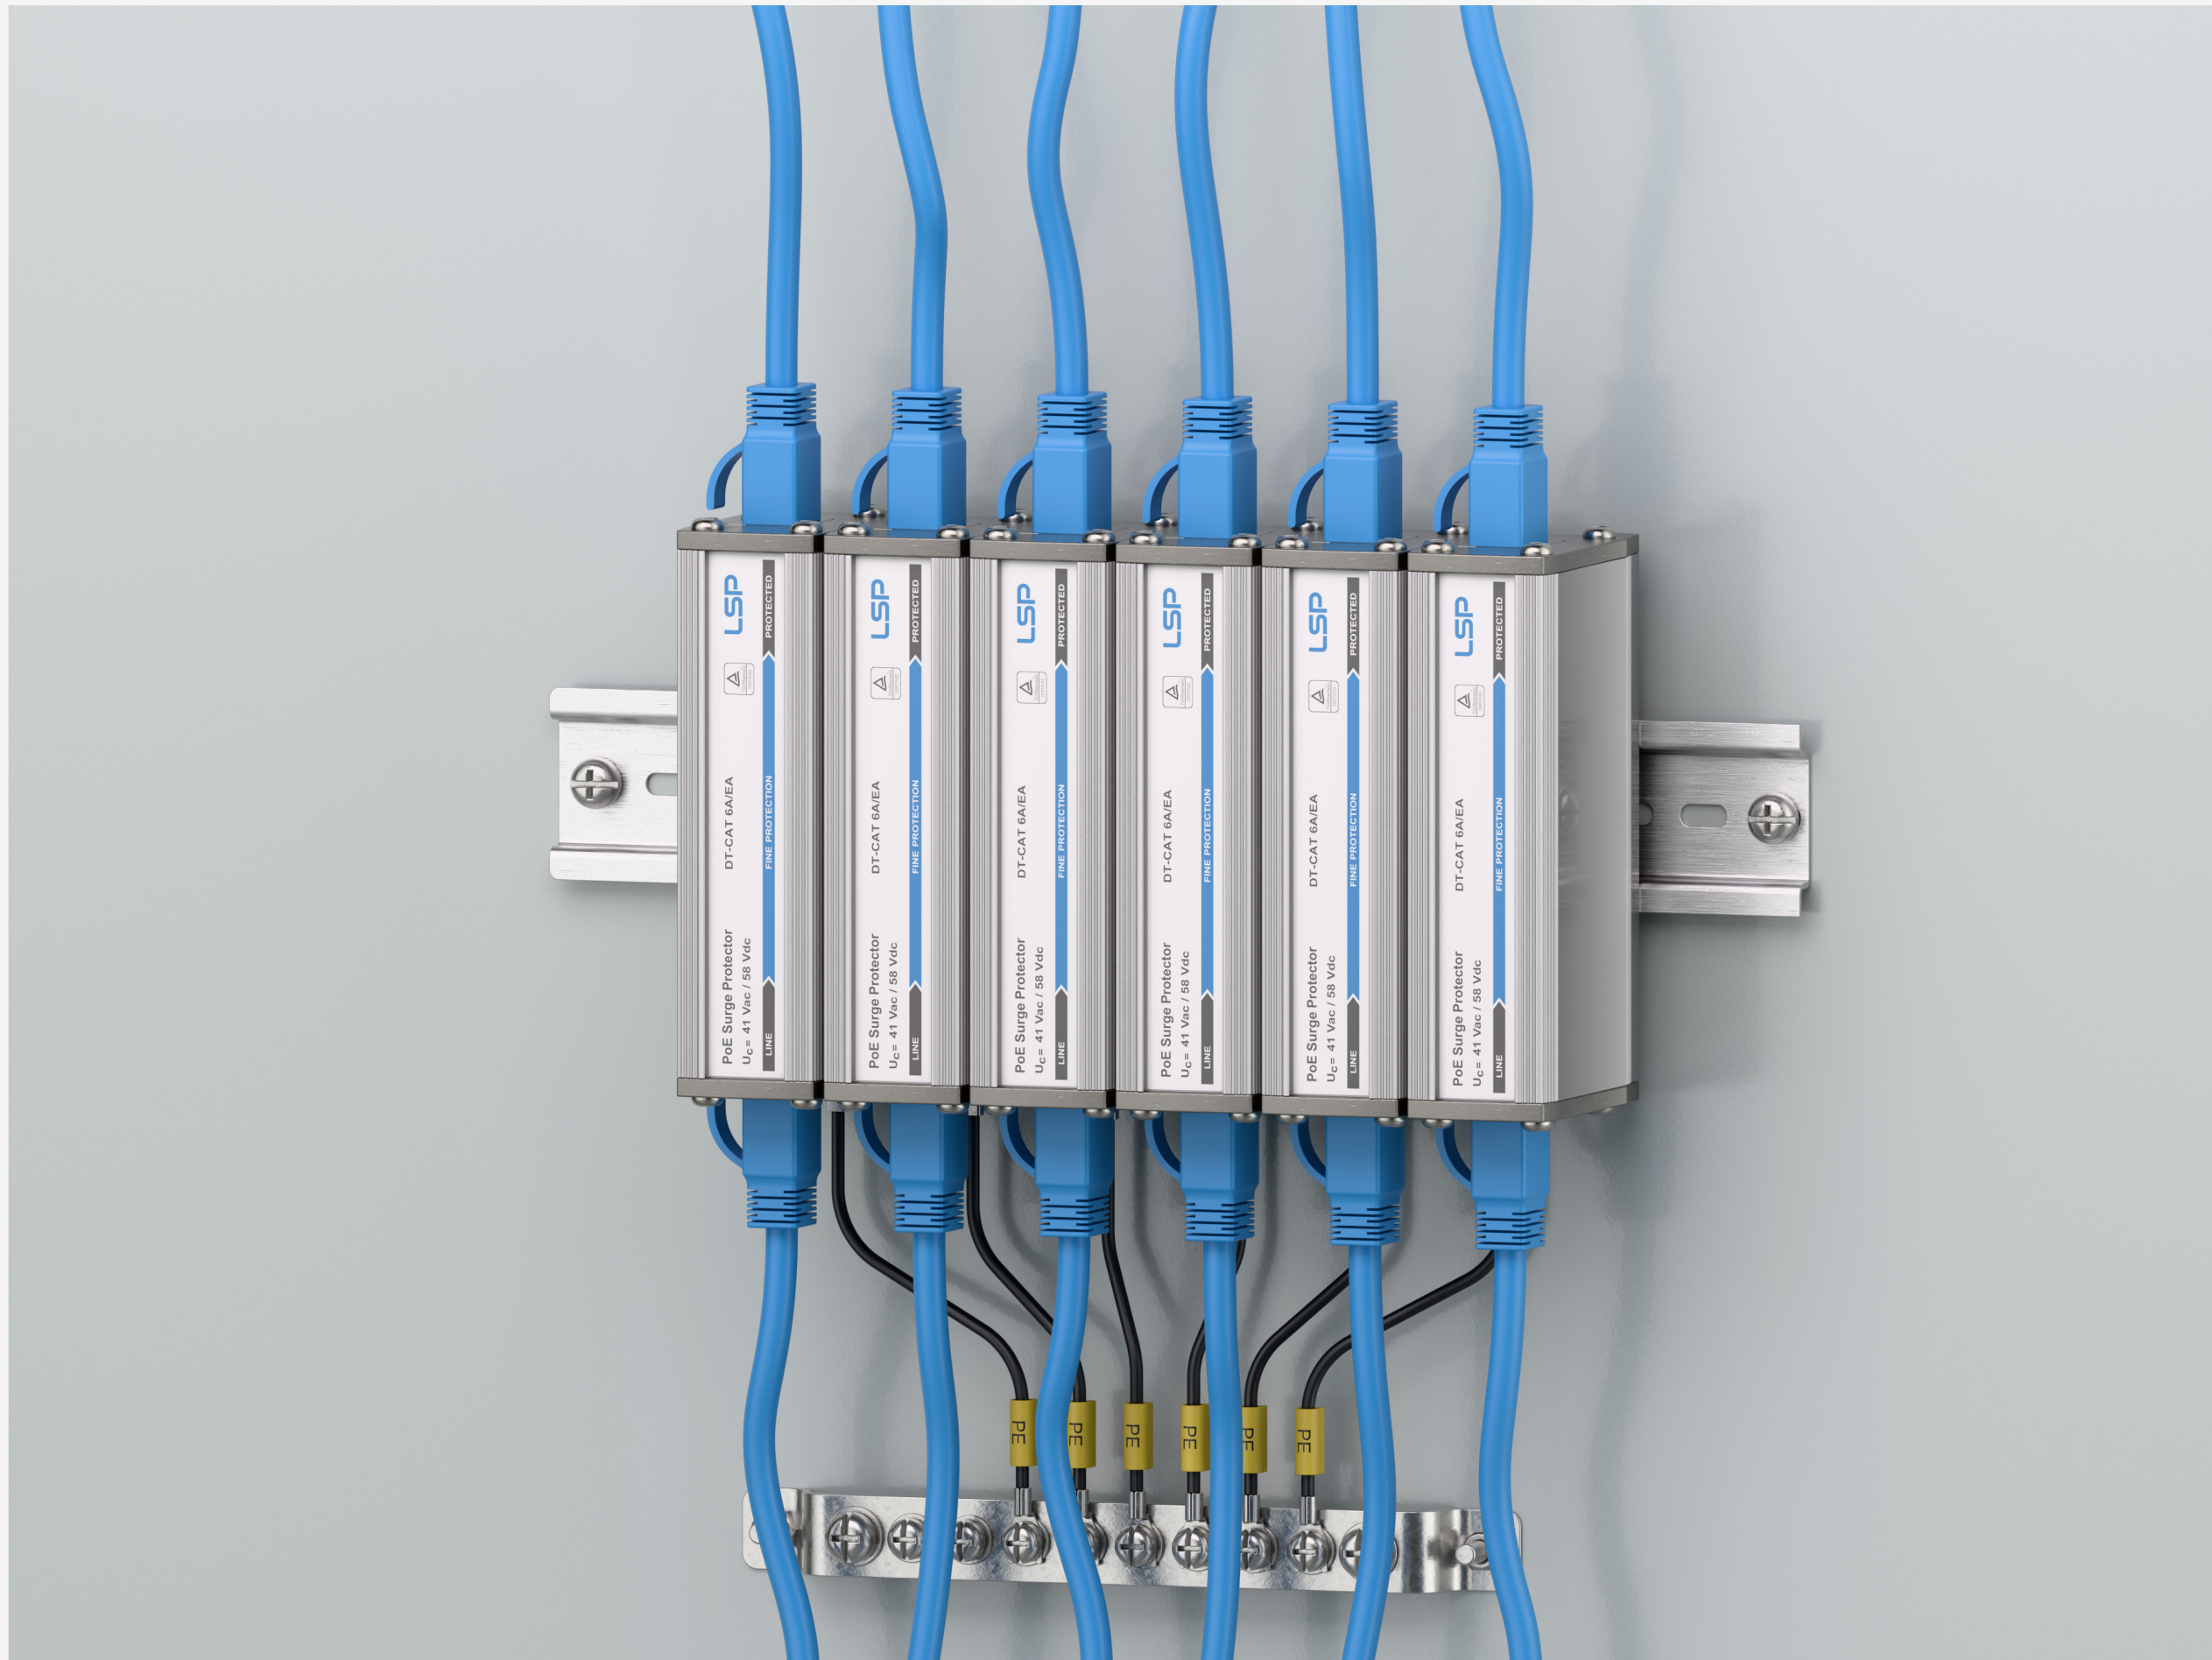

PoE Surge Protector

DT-CAT 6A/EA

Max. continuous operating voltage (a.c.)	U_c	41 V
Max. continuous operating voltage (d.c.)	U_c	58 V
Max. continuous operating voltage (d.c.) pair-pair (PoE)	U_c	57 V
Rated current	I_L	1 A
Impulse durability (Line-Line)	C1: 500 V / 250 A	
Nominal discharge current C2 (Total)	7 kA	
Impulse durability (Line-PE)	C2: 5 kV / 2.5 kA	
Impulse durability (Line-PE)	C3: 1000 V / 10 A	
Impulse durability (Line-PE)	C1: 1000 V / 500 A	