
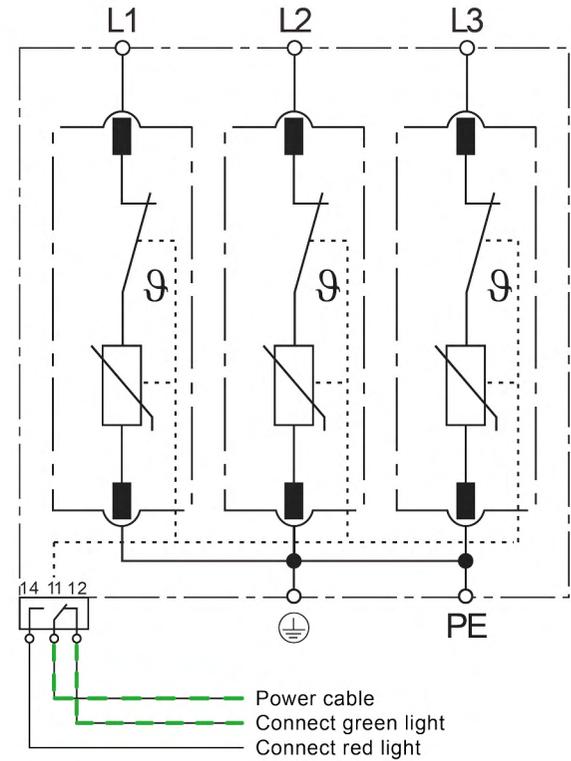



Type 1+2 SPD FLP12,5-275/3S

| | | |
|--|-----------|---------|
| Maximum Continuous Operating Voltage (AC) | U_c | 275 V |
| Nominal Discharge Current (8/20 μ s) | I_n | 20 kA |
| Impulse Discharge Current (10/350 μ s) | I_{imp} | 12.5 kA |
| Voltage Protection Level | U_p | 1500 V |



Remote Signaling Terminal Normal Status

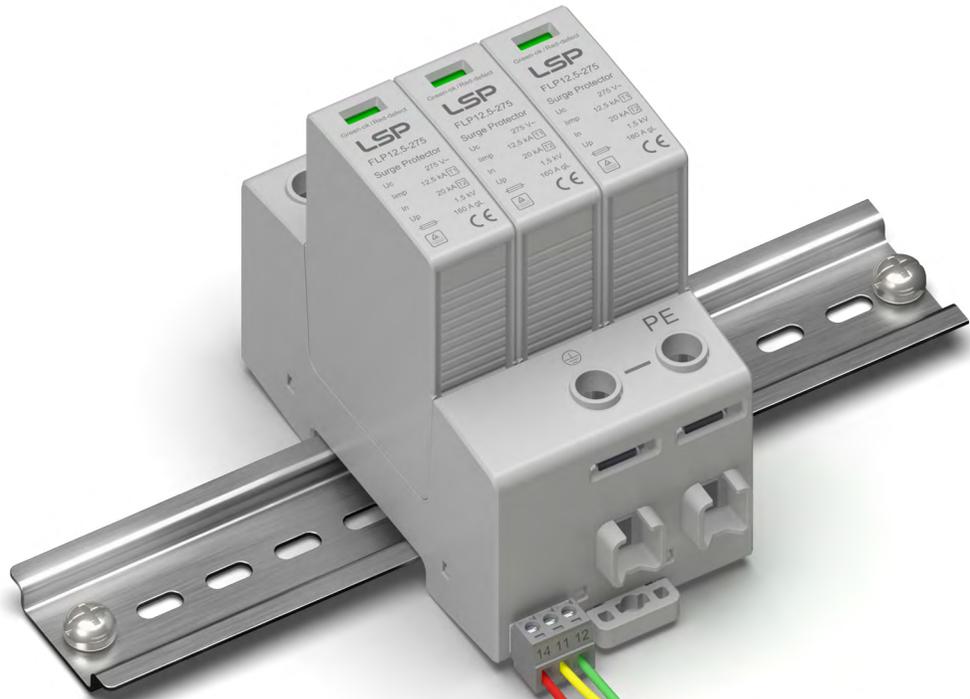

Green: ok

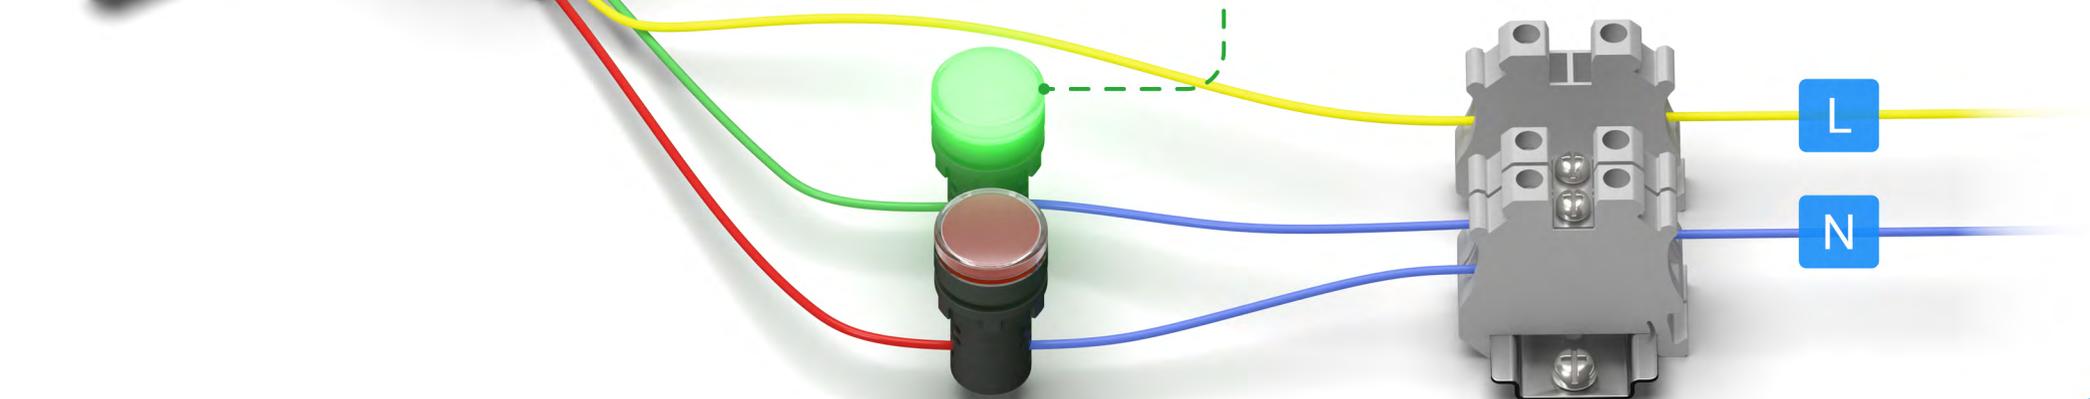

Remote Signaling Terminal Fault Status

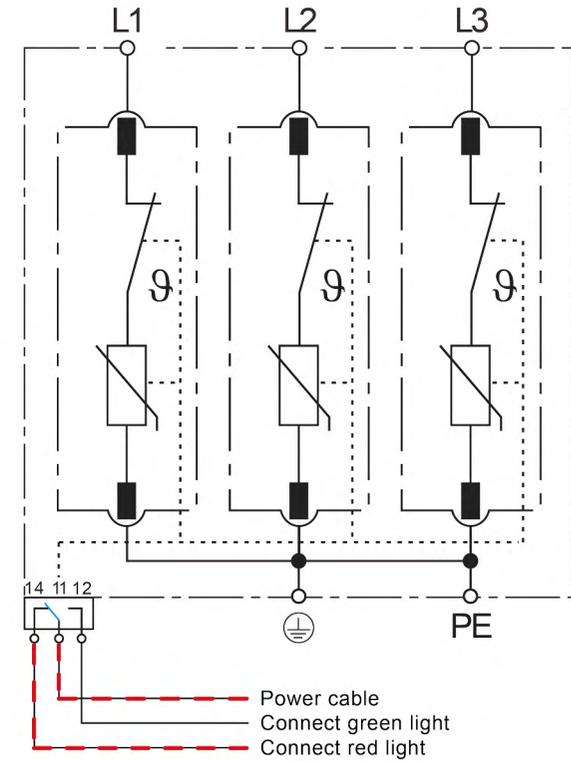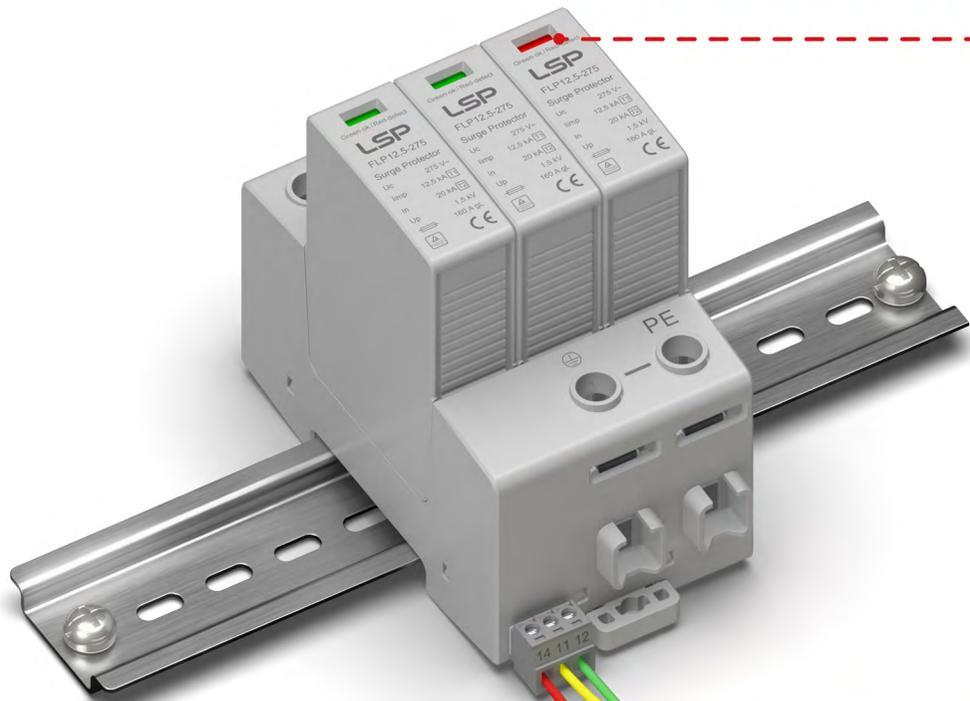

Red: defect

