



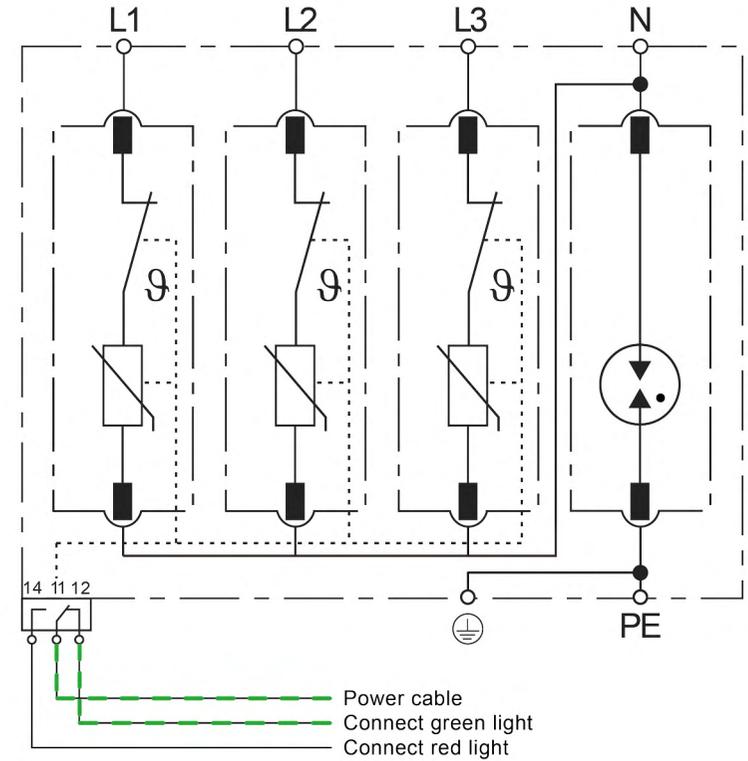


Type 1+2 SPD FLP12,5-275/3S+1

Maximum Continuous Operating Voltage (AC)	U_c	(L-N) / (N-PE)	275 V / 255 V
Nominal Discharge Current (8/20 μ s)	I_n	(L-N) / (N-PE)	20 kA / 50 kA
Impulse Discharge Current (10/350 μ s)	I_{imp}	(L-N) / (N-PE)	12.5 kA / 50 kA
Voltage Protection Level	U_p	(L-N) / (N-PE)	1.5 kV / 1.5 kV



Remote Signaling Terminal Normal Status

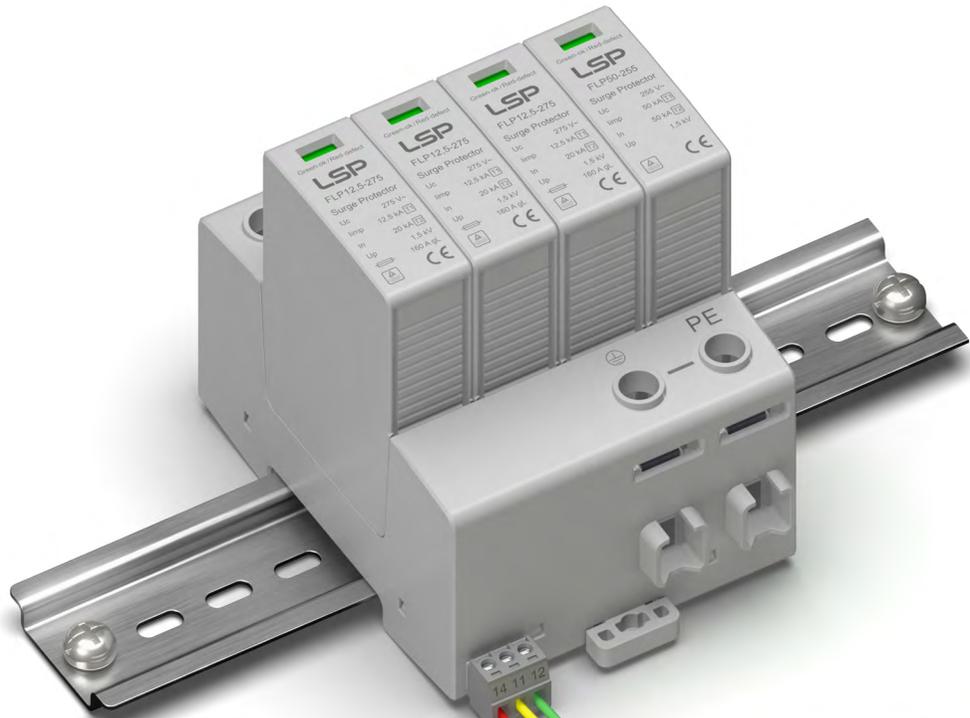

Green: ok

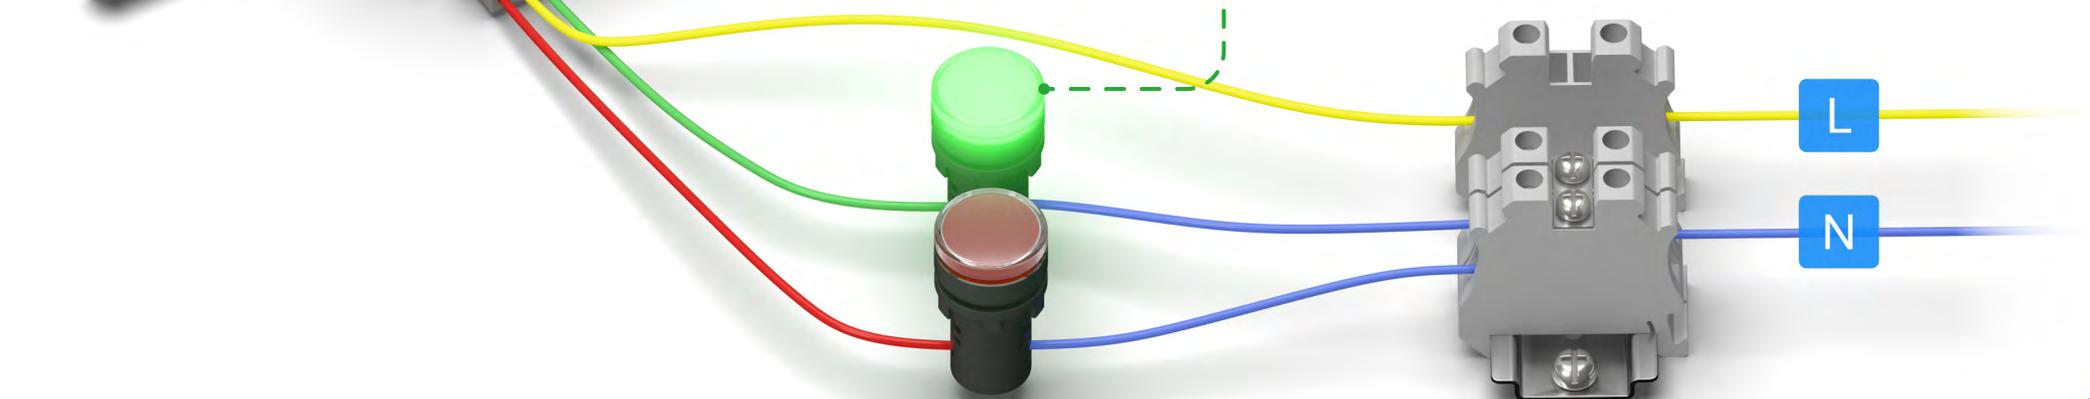

Remote Signaling Terminal Fault Status

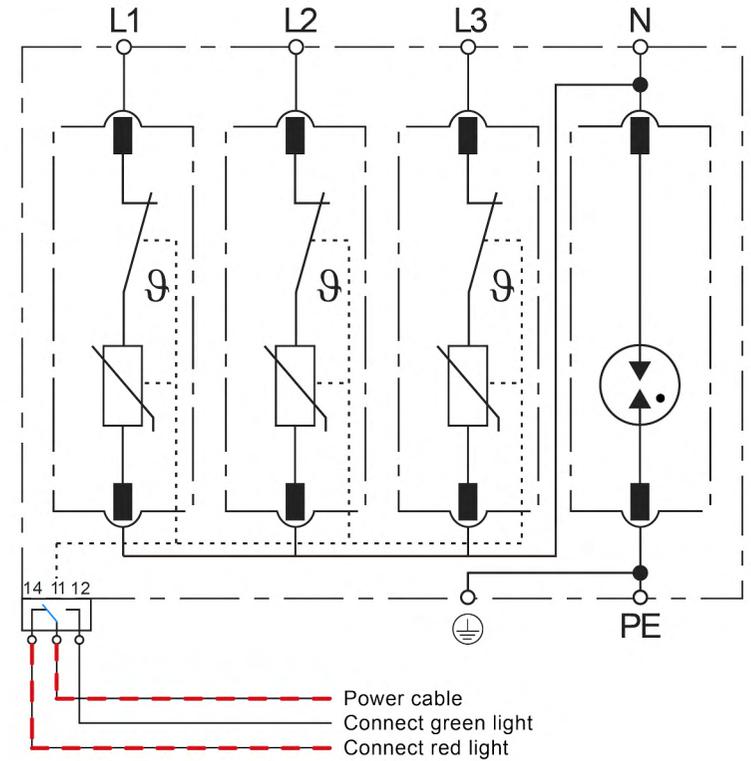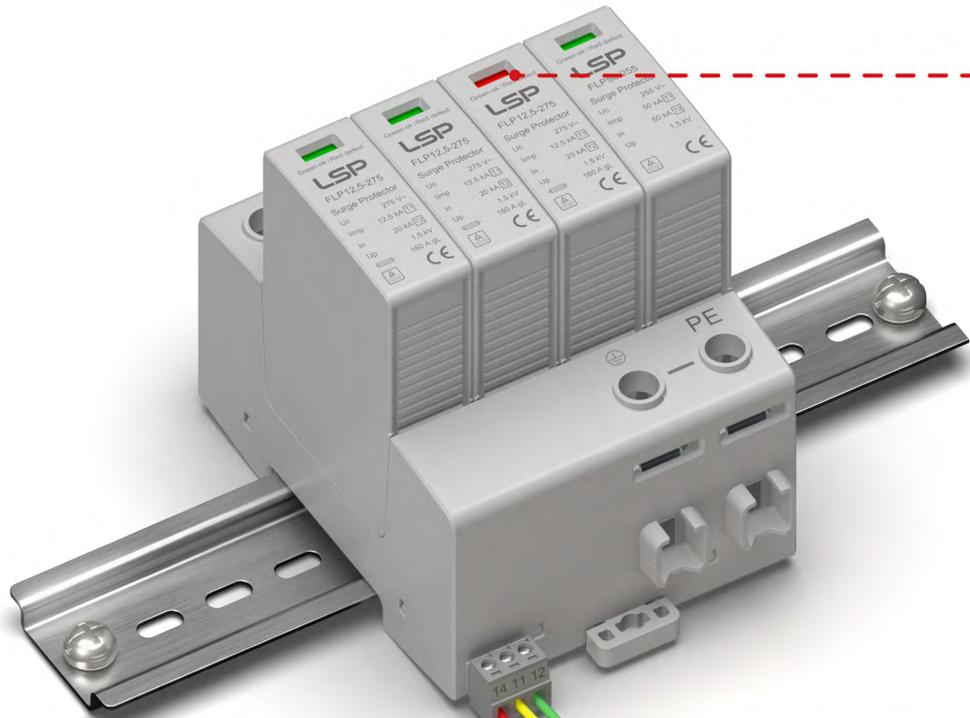

Red: defect

