
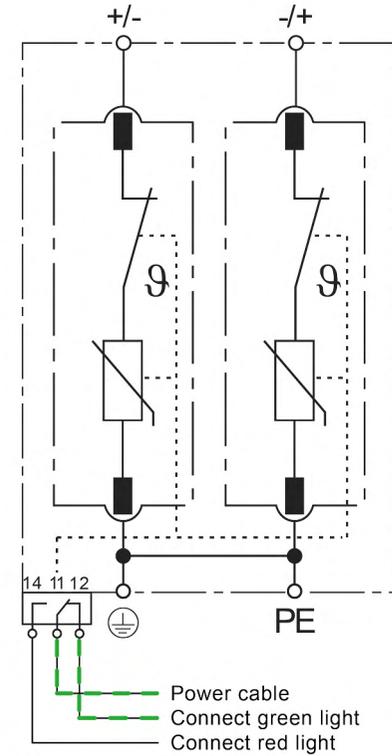



Type 2 SPD SLP20-DC38/2S

Maximum Continuous Operating Voltage (DC)	U_{cdc}	38 Vdc
Nominal Discharge Current (8/20 μ s)	I_n	10 kA
Maximum Discharge Current (8/20 μ s)	I_{max}	20 kA
Voltage Protection Level	U_p	250 V



Remote Signaling Terminal Normal Status

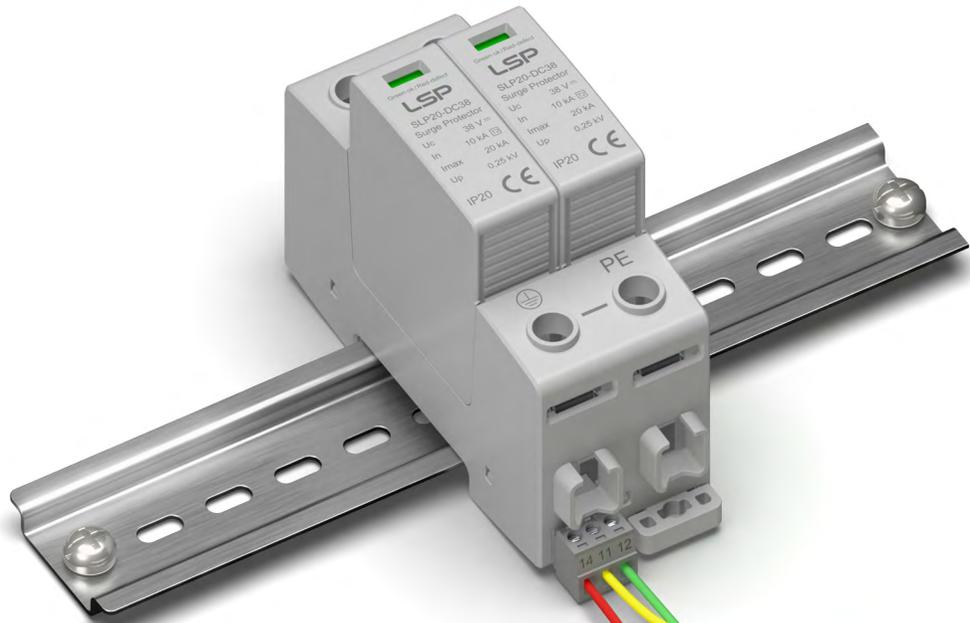

Green: ok

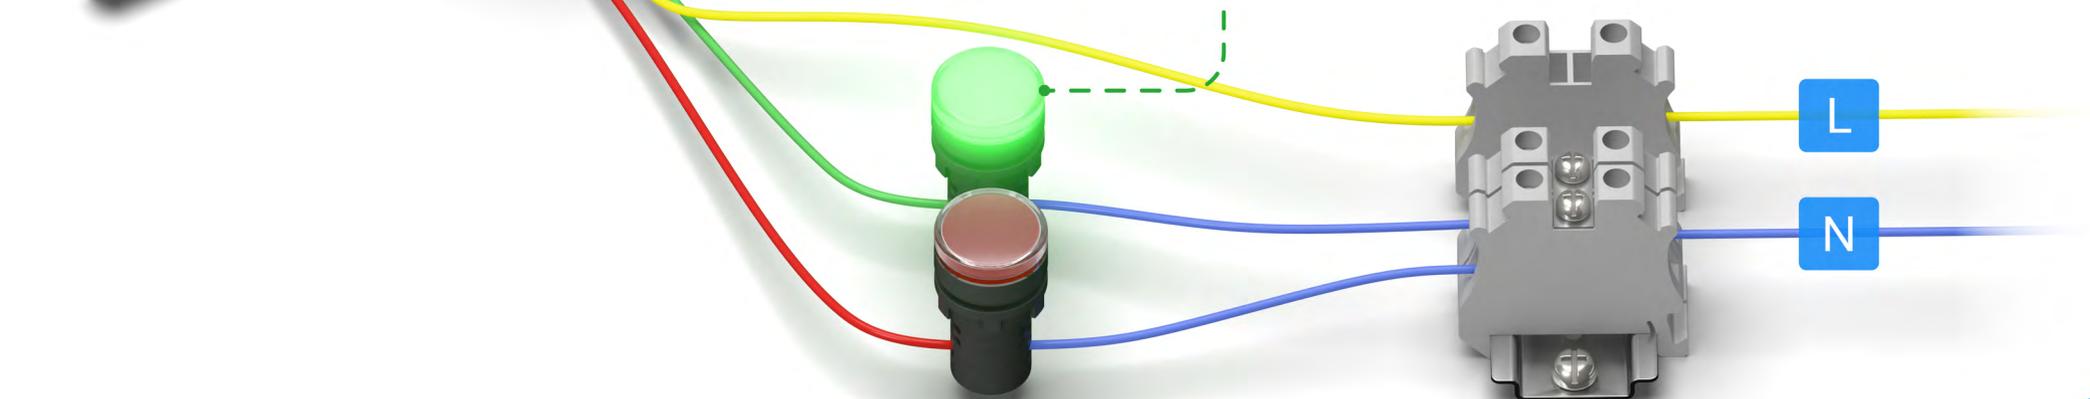

Remote Signaling Terminal Fault Status

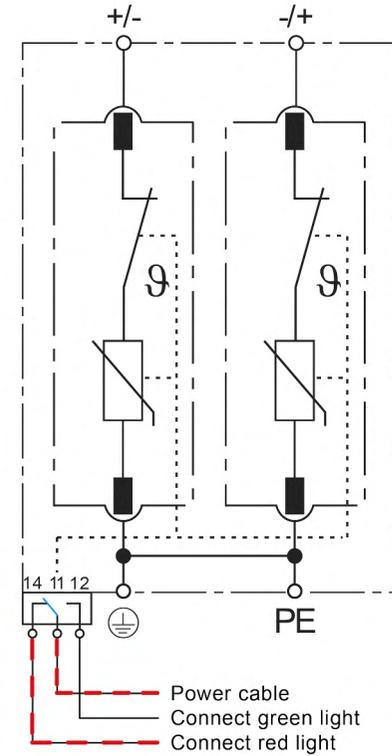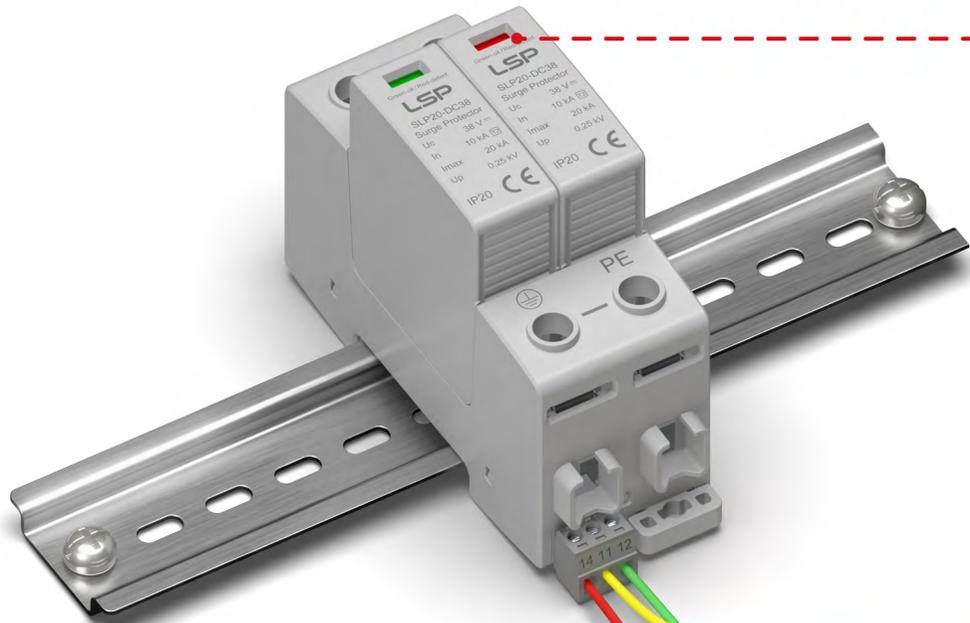

Red: defect

