DC Surge Protector
Wiring Diagram

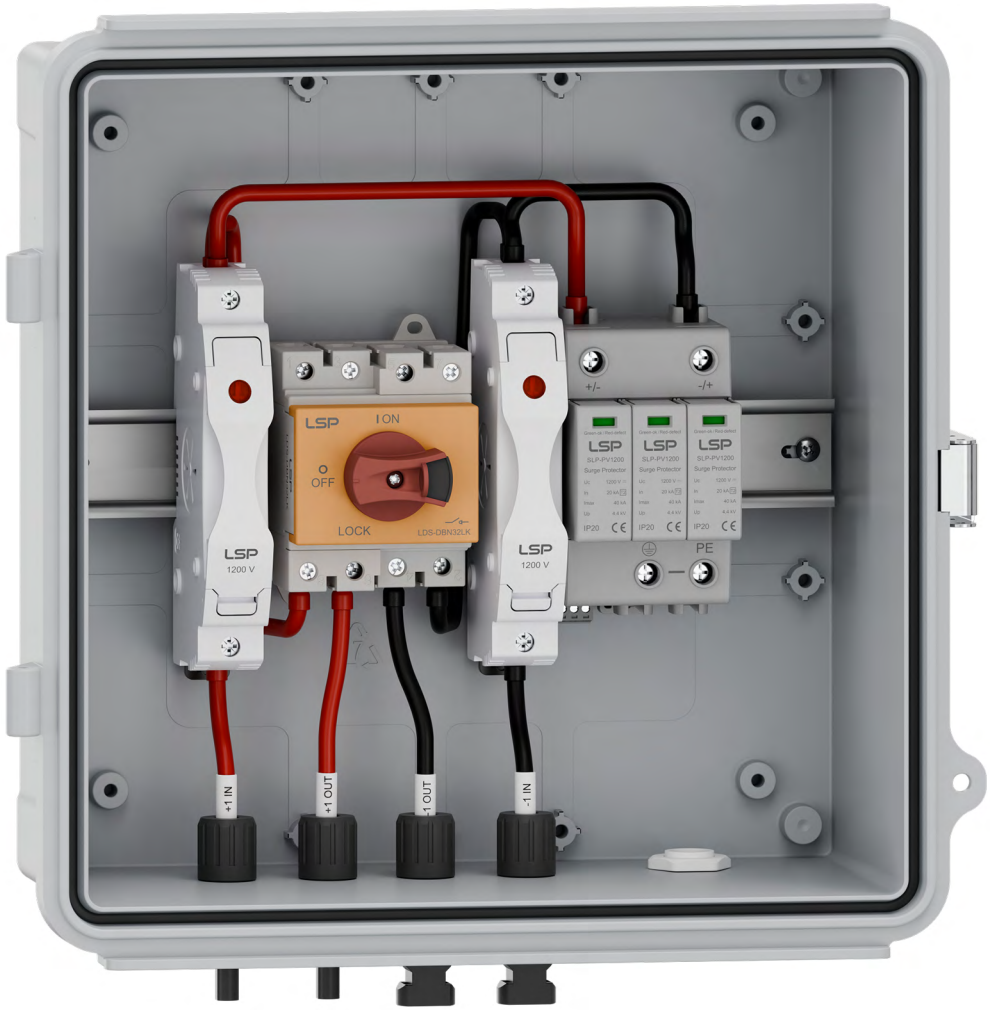

Type 2 SPD

SLP-PV1200/S

Maximum Continuous Operating Voltage (DC)	U_{CPV}	(DC+)-PE, (DC-)-PE / (DC+)-(DC-)	1000 V / 1000 V
Nominal Discharge Current (8/20 µs)	I_n	-	20 kA
Maximum Discharge Current (8/20 µs)	I_{max}	-	40 kA
Voltage Protection Level	U_p	(DC+)-PE, (DC-)-PE / (DC+)-(DC-)	4.4 kV / 4.4 kV

Remote Signaling Terminal
Normal Status

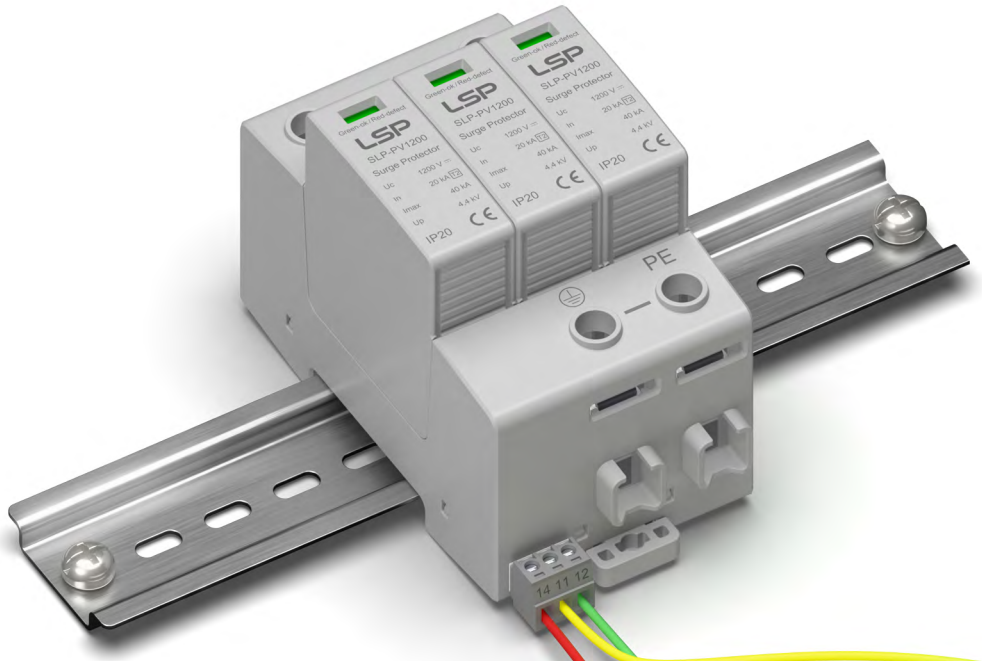

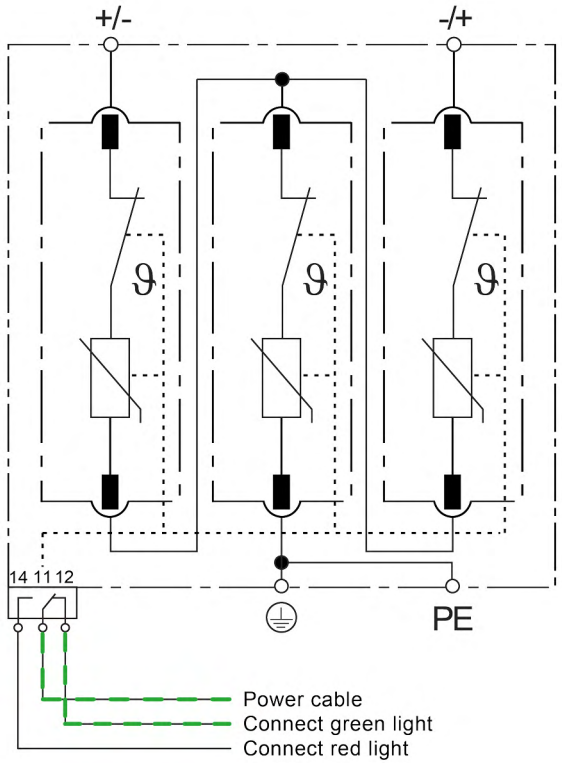

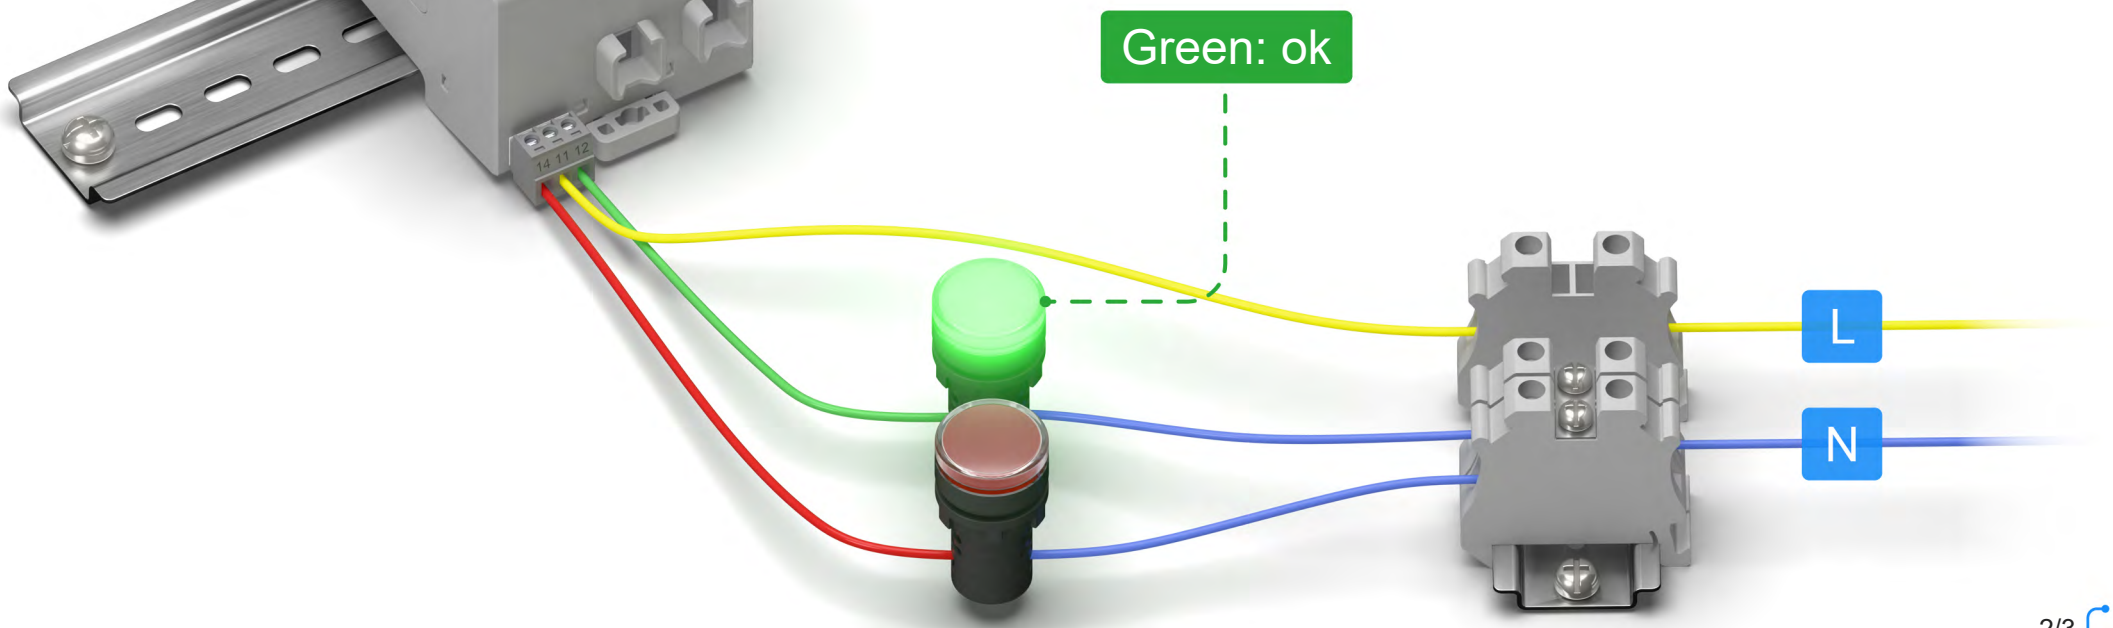

Remote Signaling Terminal
Fault Status

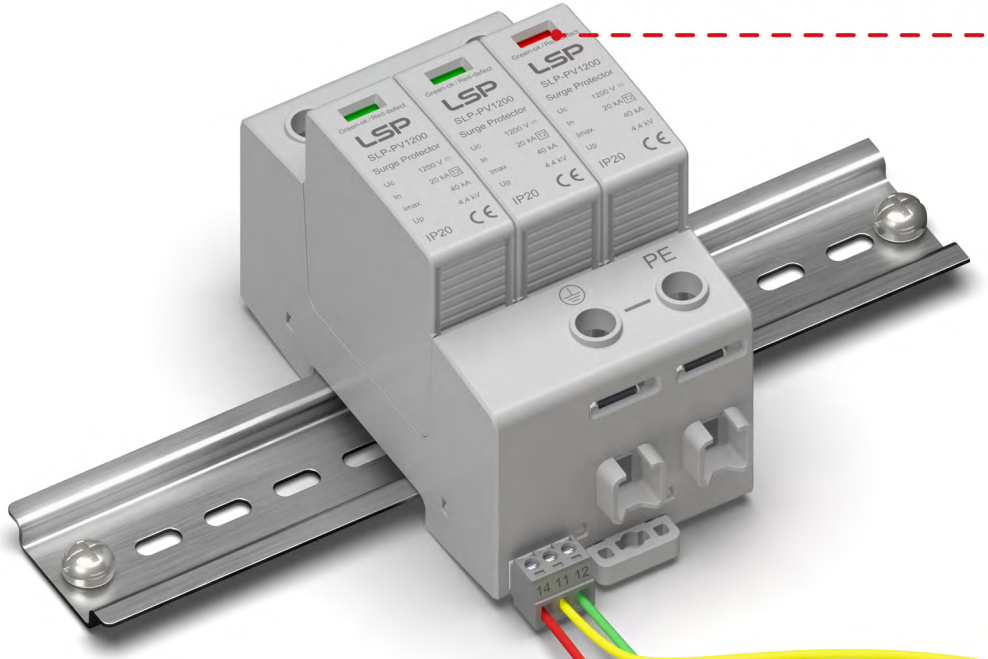

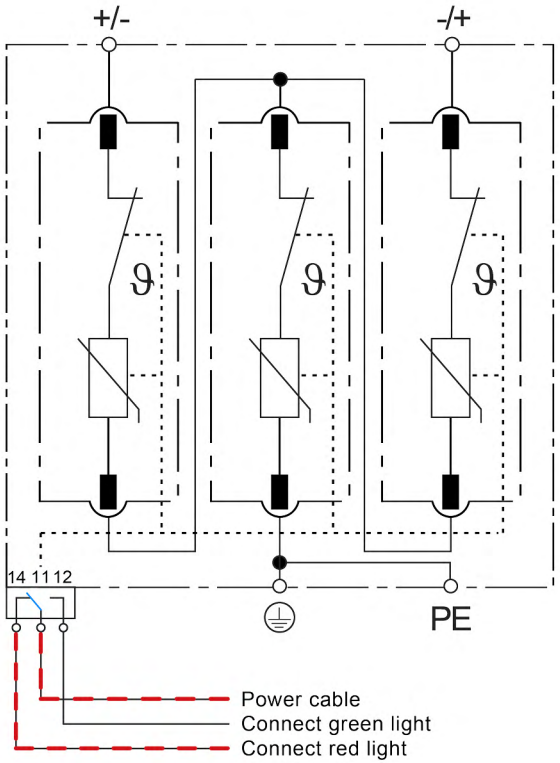

Red: defect

L

N