AC Surge Protector
Wiring Diagram

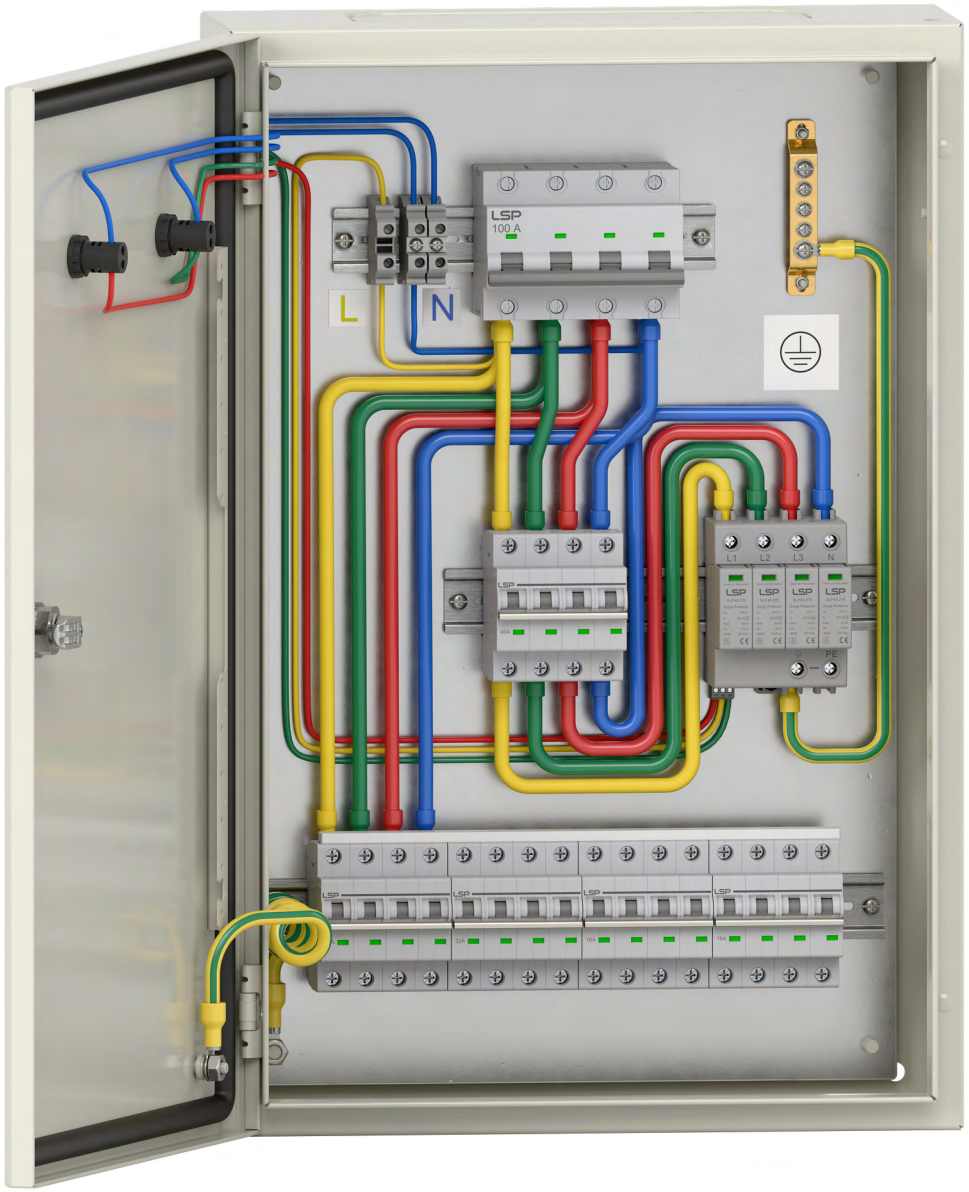

Type 2 SPD

SLP40-275/4S

Maximum Continuous Operating Voltage (AC)	U_c	275 V
Nominal Discharge Current (8/20 µs)	I_n	20 kA
Maximum Discharge Current (8/20 µs)	I_{max}	40 kA
Voltage Protection Level	U_p	1500 V

Remote Signaling Terminal
Normal Status

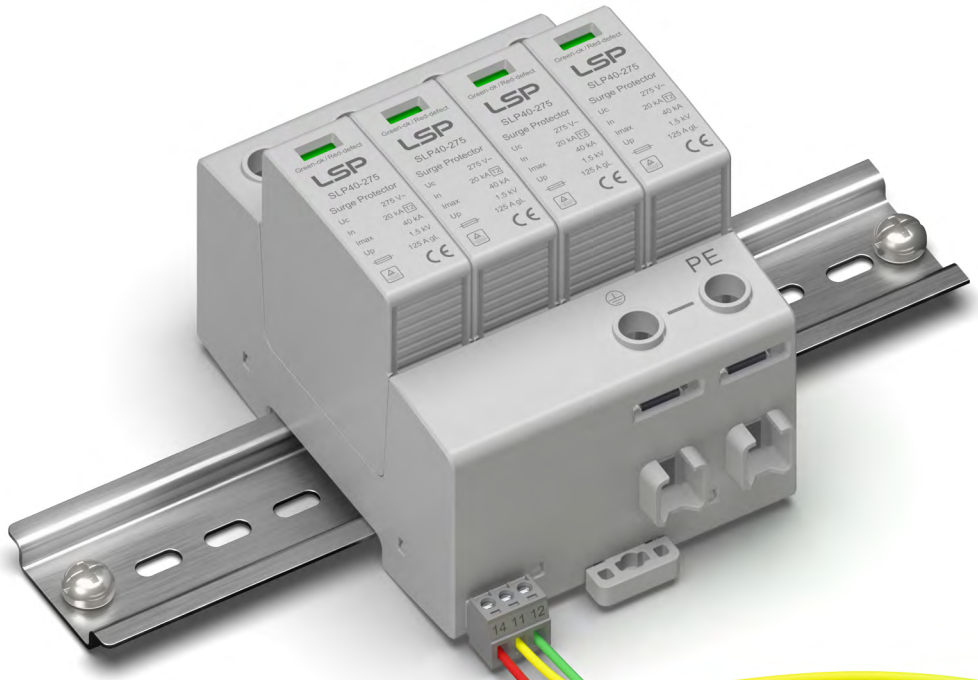

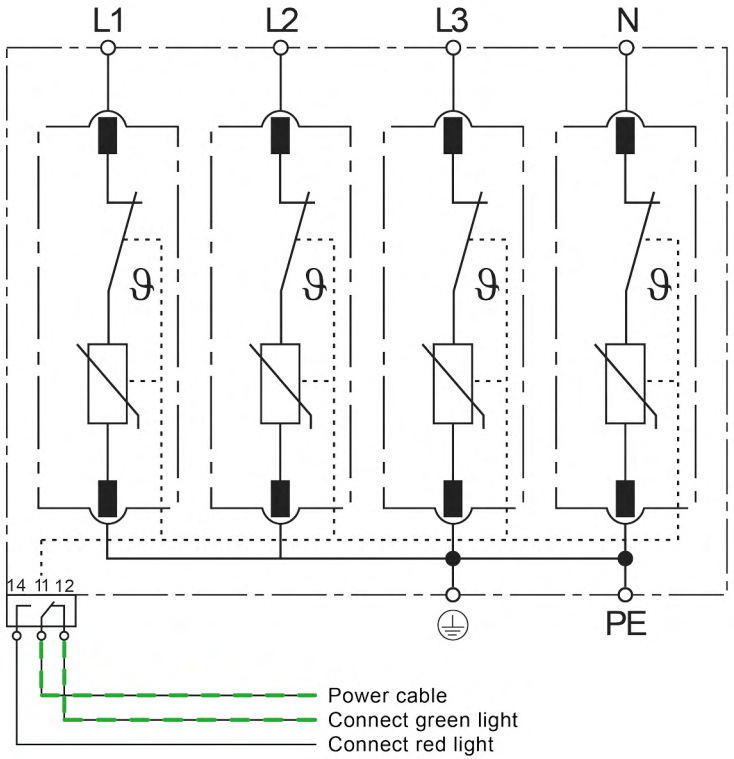

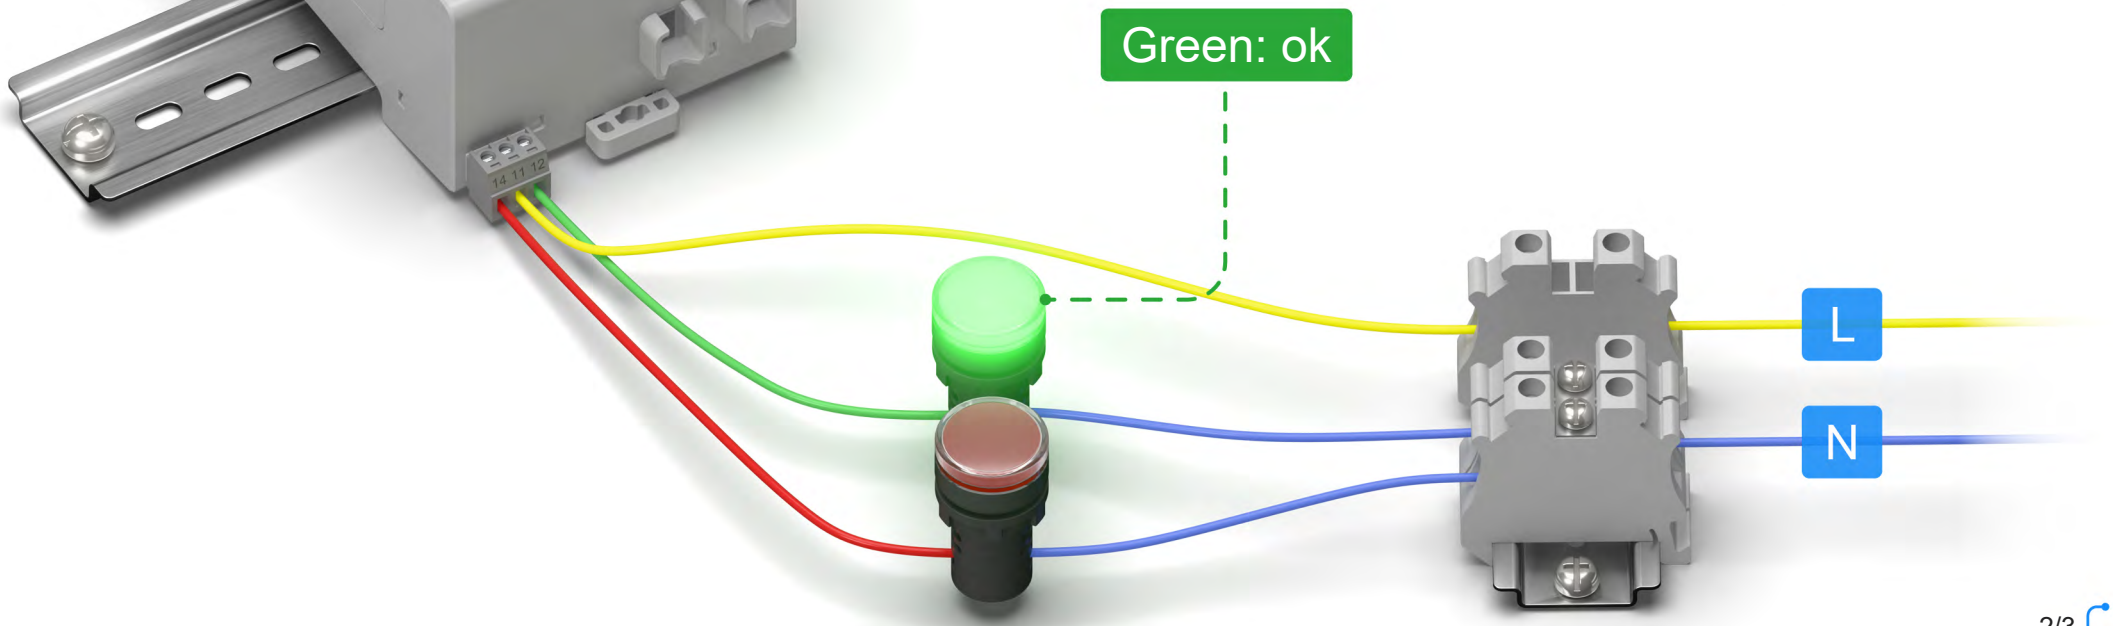

Remote Signaling Terminal
Fault Status

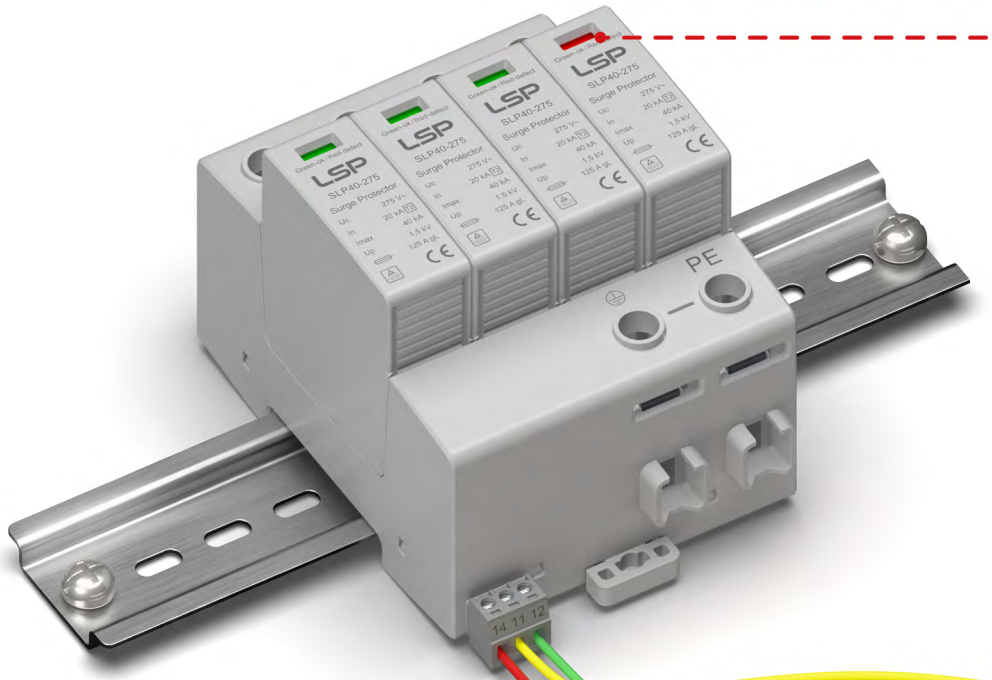

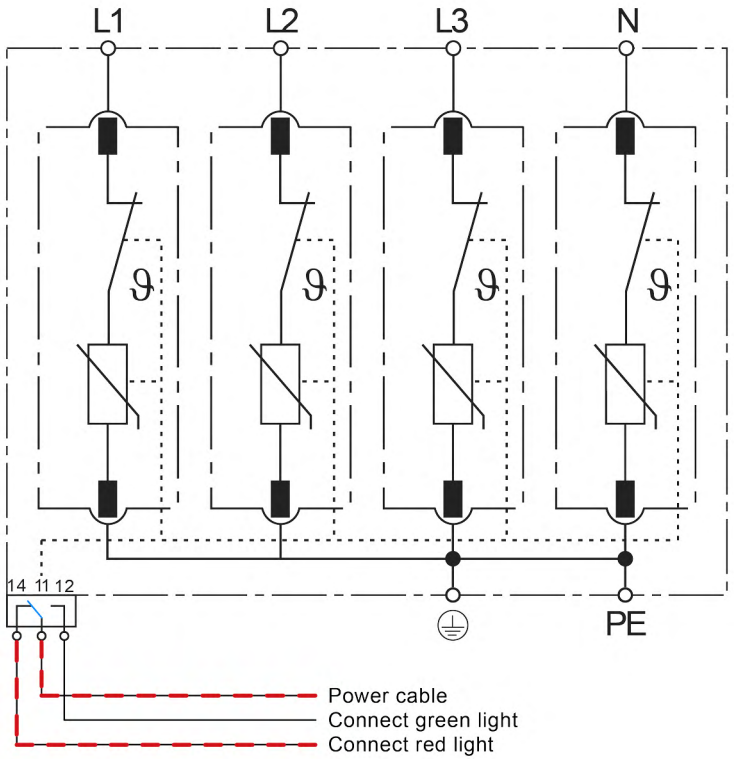
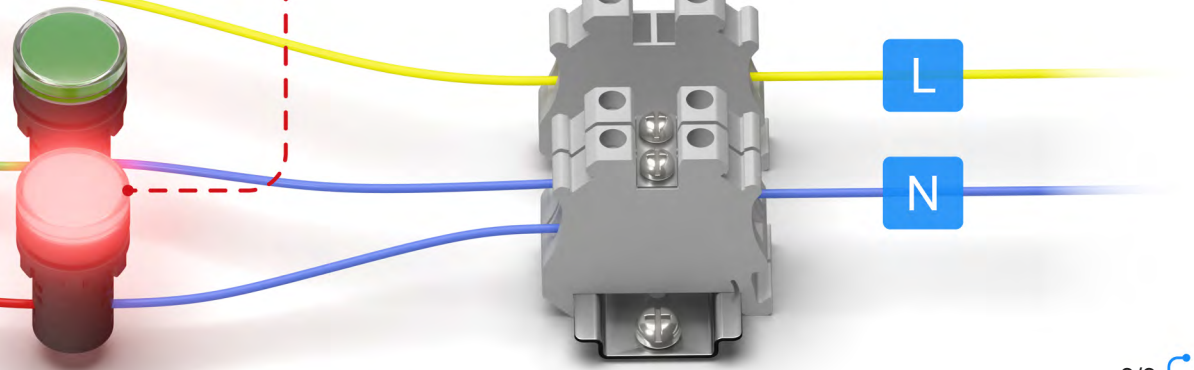
Red: defect