




AC Surge Protector Wiring Diagram

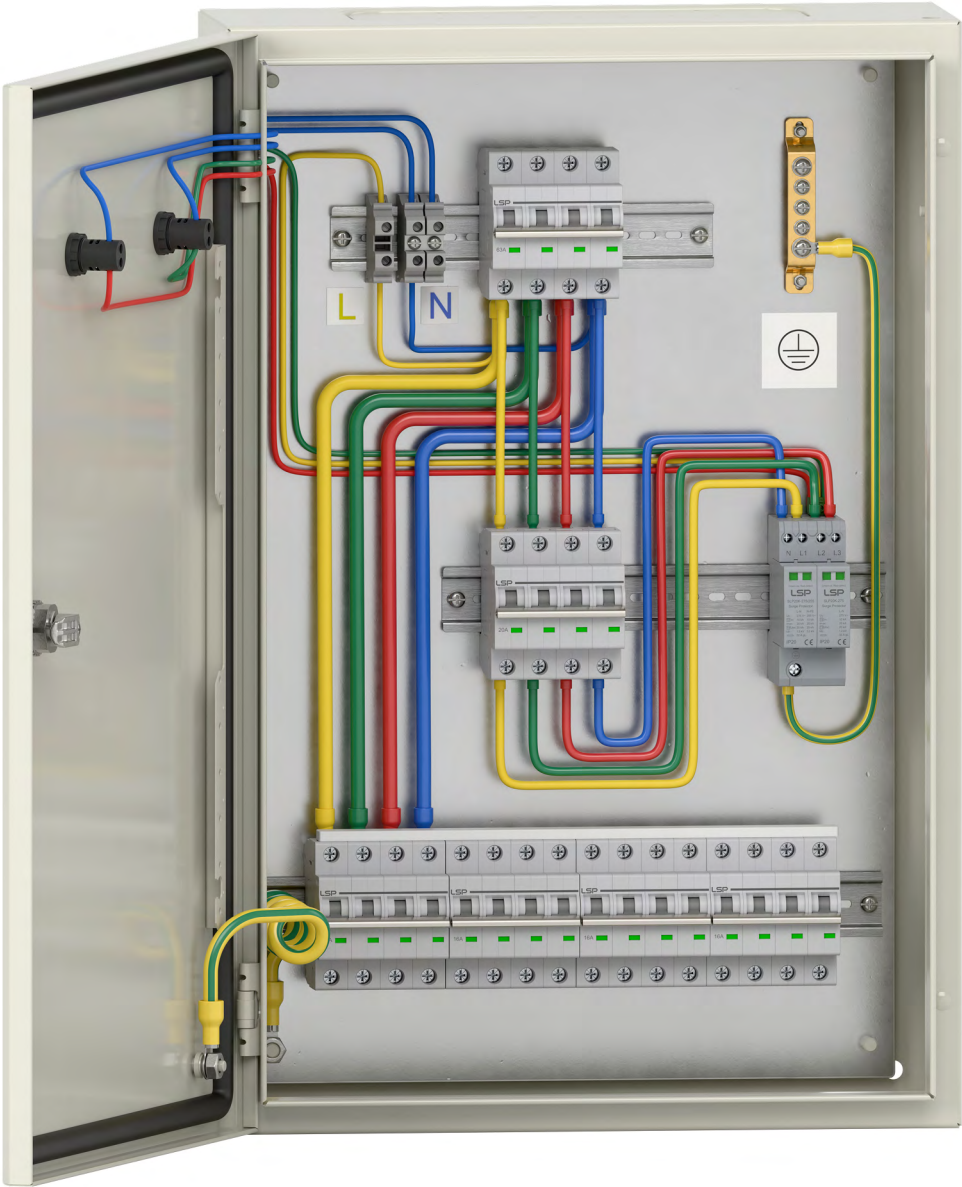


Type 2+3 SPD
SLP20K-275/3S+1

Maximum Continuous Operating Voltage (AC)	U_c	(L-N) / (N-PE)	275 V / 255 V
Nominal Discharge Current (8/20 μ s)	I_n	(L-N) / (N-PE)	10 kA / 10 kA
Maximum Discharge Current (8/20 μ s)	I_{max}	(L-N) / (N-PE)	20 kA / 20 kA
Voltage Protection Level	U_p	(L-N) / (N-PE)	1.2 kV / 1.0 kV


Remote Signaling Terminal Normal Status

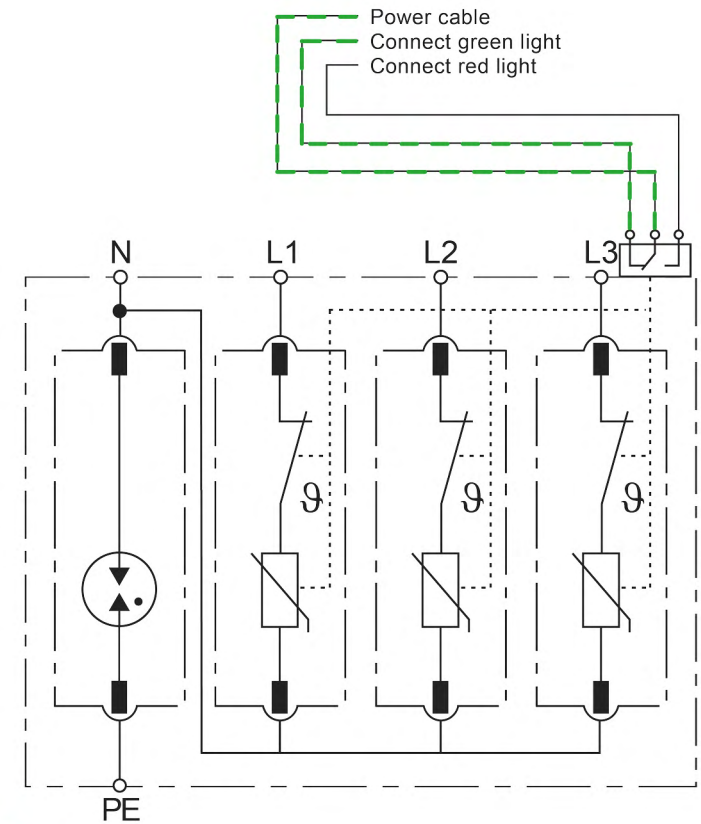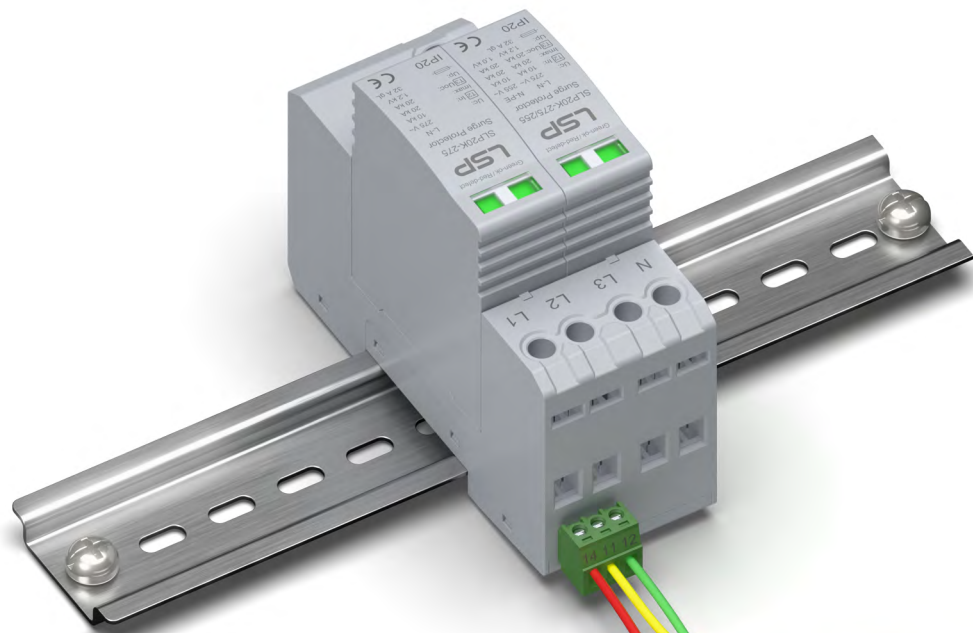

Green: ok

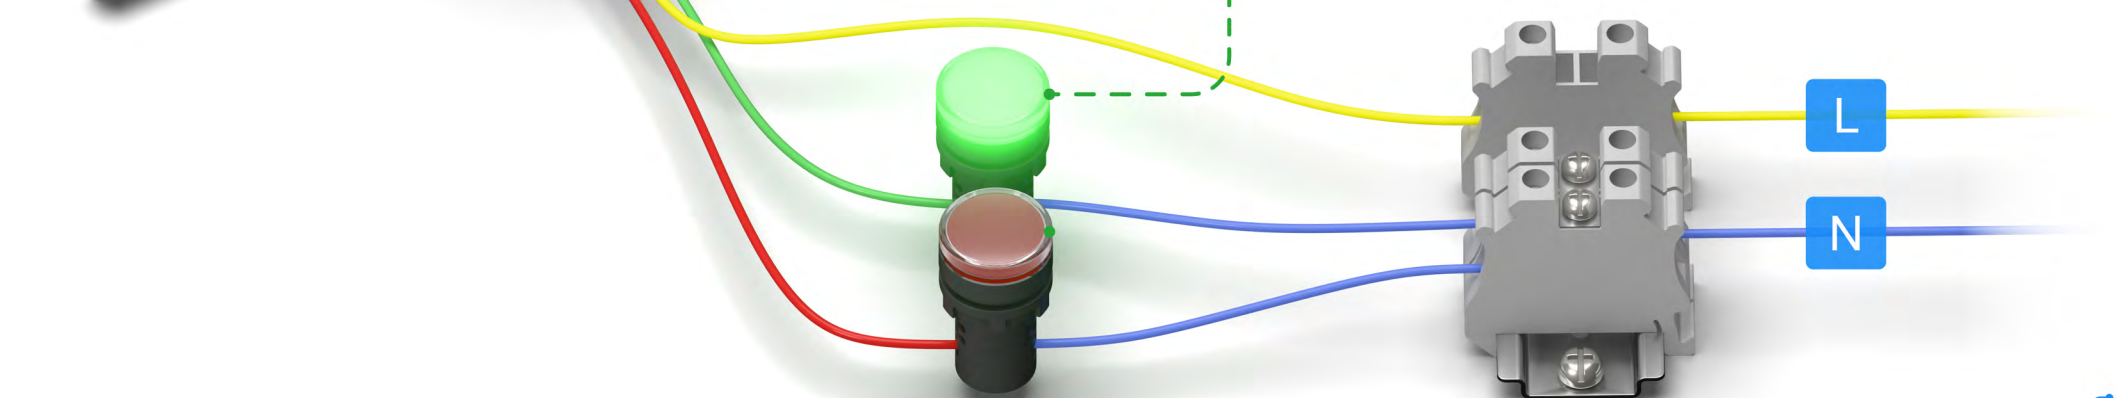

Remote Signaling Terminal Fault Status

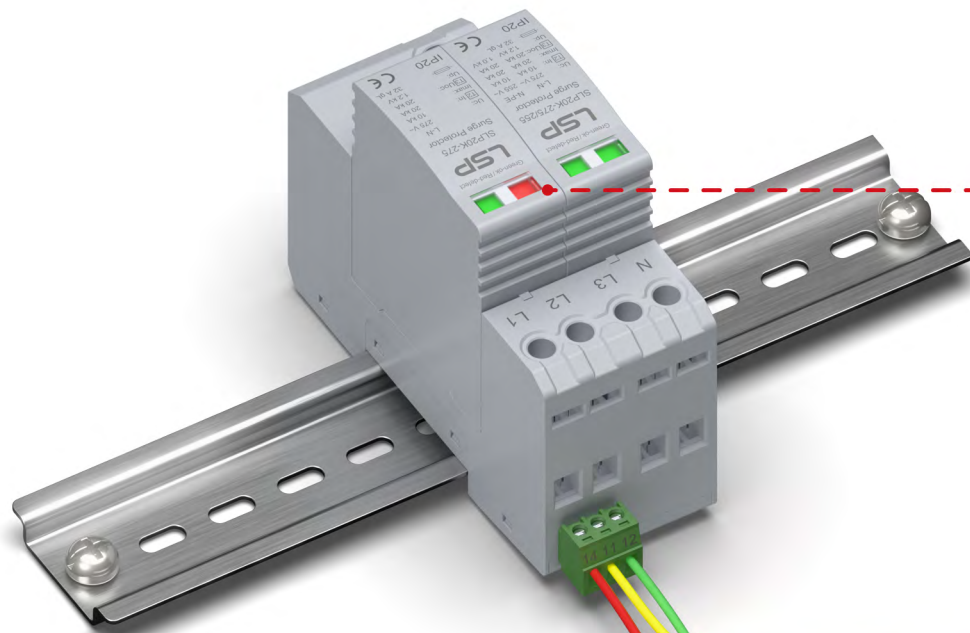

Red: defect

