




AC Surge Protector Wiring Diagram

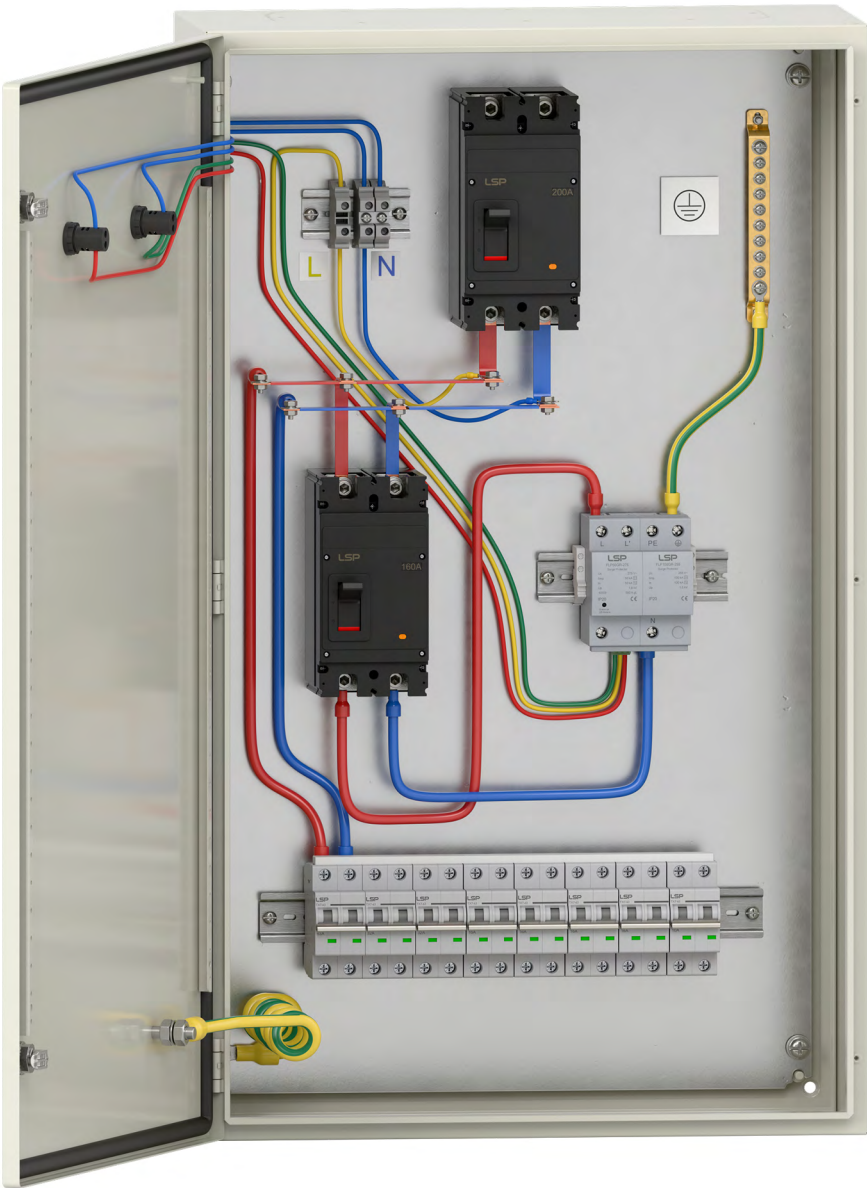


Type 1 SPD FLP50GR-275/1S+1

Maximum Continuous Operating Voltage (AC)	U _c	(L-N) / (N-PE)	275 V / 255 V
Nominal Discharge Current (8/20 μs)	I _n	(L-N) / (N-PE)	50 kA / 100 kA
Impulse Discharge Current (10/350 μs)	I _{imp}	(L-N) / (N-PE)	50 kA / 100 kA
Voltage Protection Level	U _p	(L-N) / (N-PE)	1.8 kV / 1.5 kV


Remote Signaling Terminal Normal Status

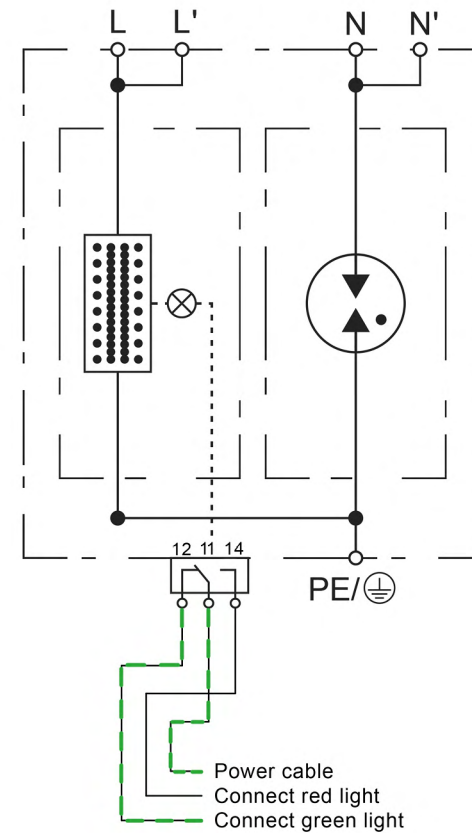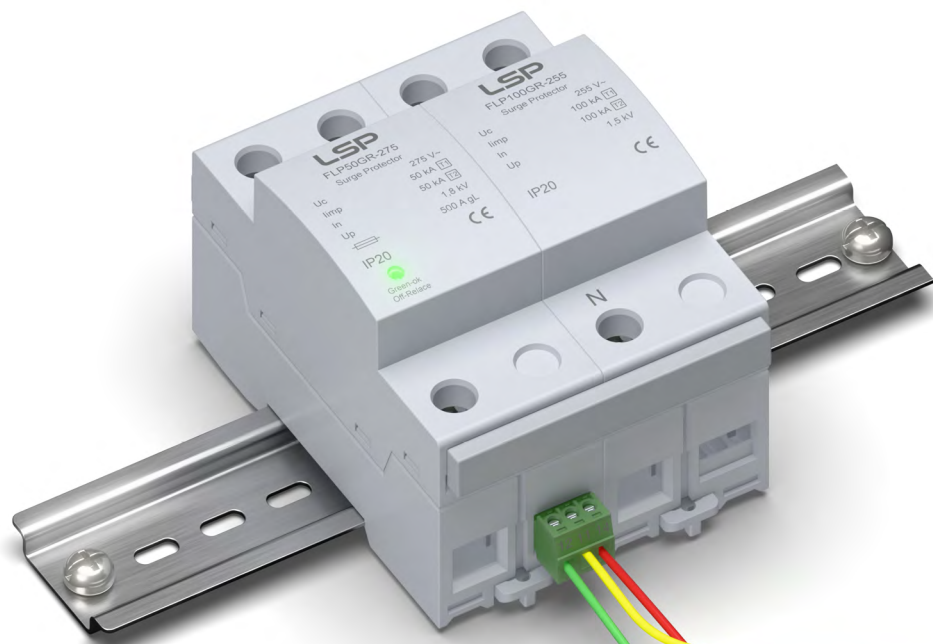

Green: ok

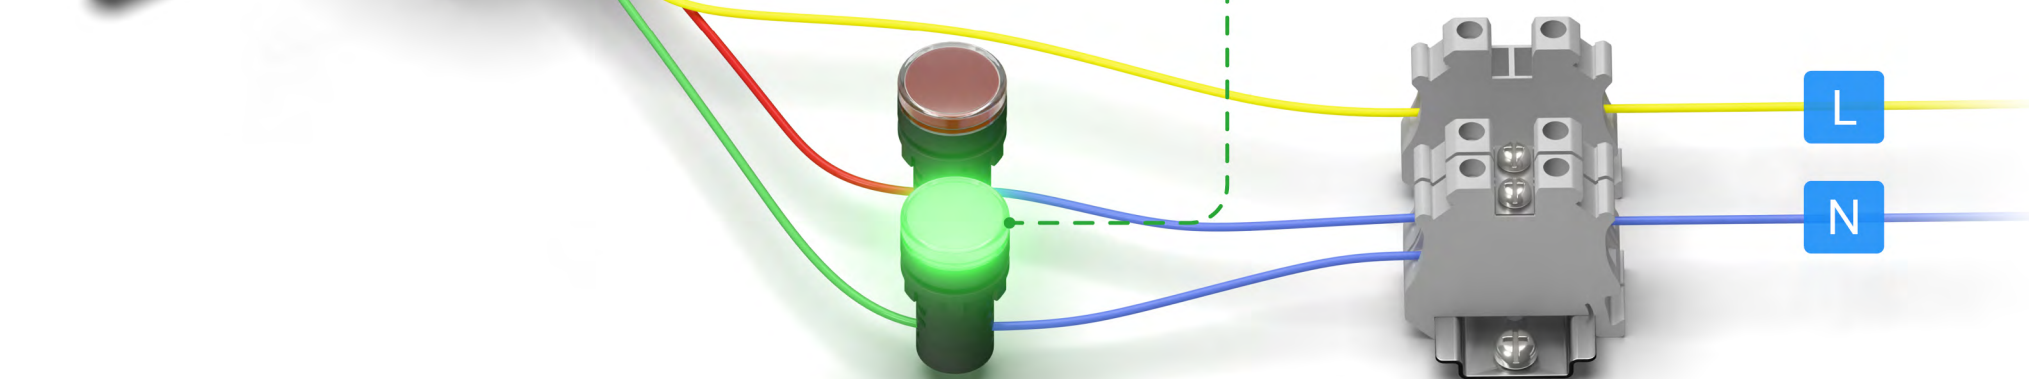

Remote Signaling Terminal Fault Status

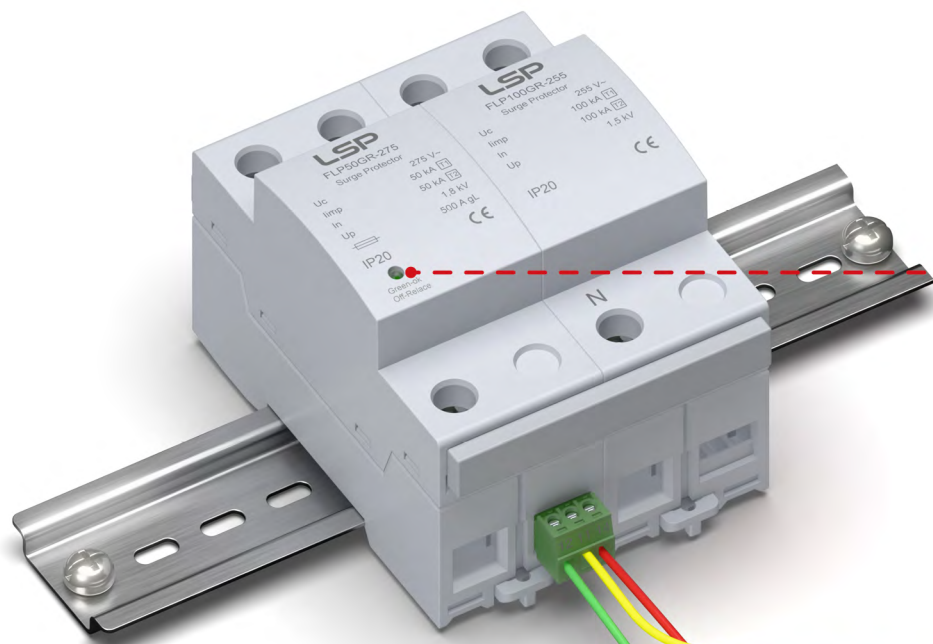

Red: defect

